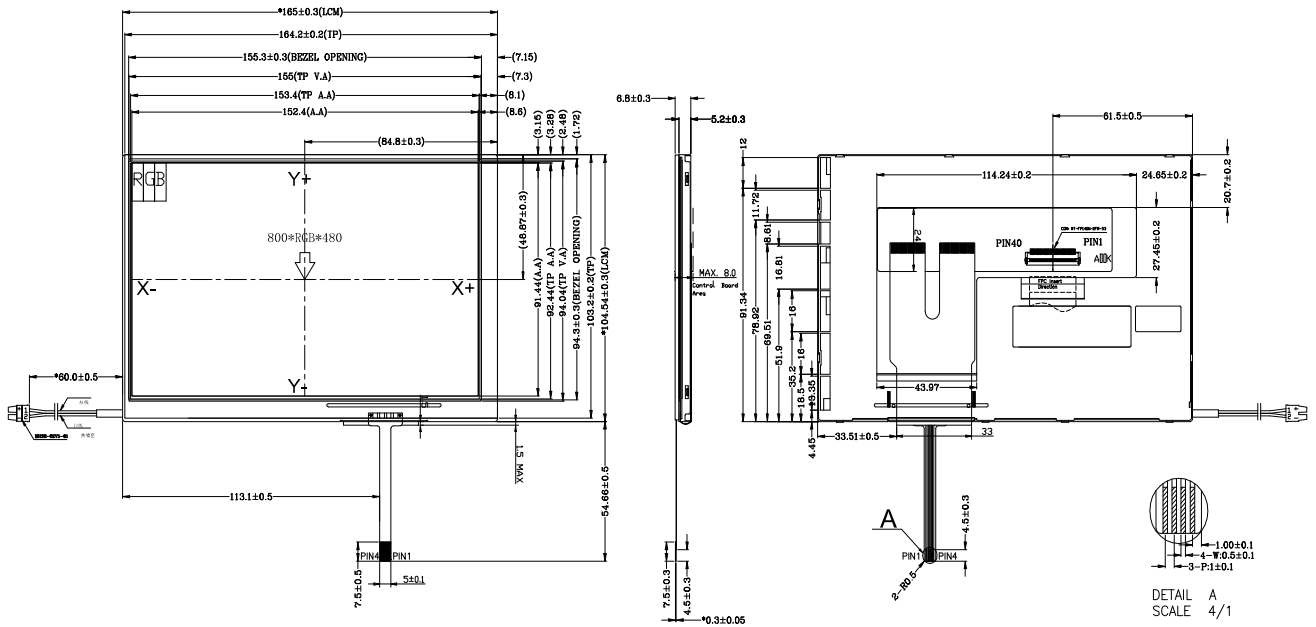

Pin	Symbol
1	GND
2	GND
3	NC
4	VCC
5	VCC
6	NC
7	VCC
8	NC
9	HC
10	CSB
11	SDO
12	SCLO
13	B5
14	B4
15	B3
16	GND
17	G2
18	G1
19	G0
20	SCLK
21	VCC
22	R5
23	R4
24	GND
25	R2
26	R1
27	R0
28	SCLB
29	HD
30	B4
31	B3
32	DEN
33	B2
34	B1
35	B0
36	CTP
37	CTP
38	SCLK
39	SCLB
40	GND

NOTES:
1. GENERAL TOLERANCE: ±0.2
2. ( ) REFERENCE DIMENSION
3. RECOMMENDED CUSHION ADHERENT ARAE: TP V.A+1.6mm
4. REFERENCED DIMENSION: ( )
5. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

Touch Panel Pin Assignment

Pin No.	Description
1	Y+
2	X+
3	Y-
4	X-



Backlight 24LED Circuit

Display Type	TFT NORMALLY WHITE,TRANSMISSIVE
Viewing Angle	12:00 CLOCK
LCD Driver IC	HX8262+HX8678
Logic Voltage	VDD=3.3V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Interface	Digital RGB(6bits/color) Data Transfer
Backlight	24-LED WHITE 160MA/9.6V
Surface luminance	330cd/m2
White X/Y	X:0.29±0.04 Y:0.32±0.04

VER.	SYMBOL	AMENDMENT	SIGN	DATE	
V03.		根据实物更新了标注尺寸		2017.1.4A	EE.CHECKED
V02.		增加连接器的型号		2015.8.27A	APPROVED
V01.		更正图纸:RTP的FPC到RTP边缘为56mm		2015.1.23A	CUSTOMER'S APPROVAL
V00.		在COG-T700MIWH-02P的基础上将RTP的FPC长度改为56mm		2015.1.19A	

TITLE: MODULE SPEC.

DRAWING NO.: TST700MIWH-08P

UNIT	mm	SCALE	FIT
3rd Angle		SHEET 1 OF 1	

深圳市一众显示科技有限公司