

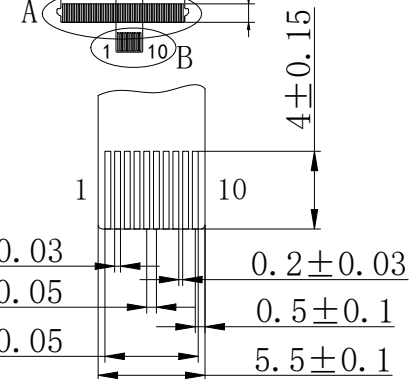
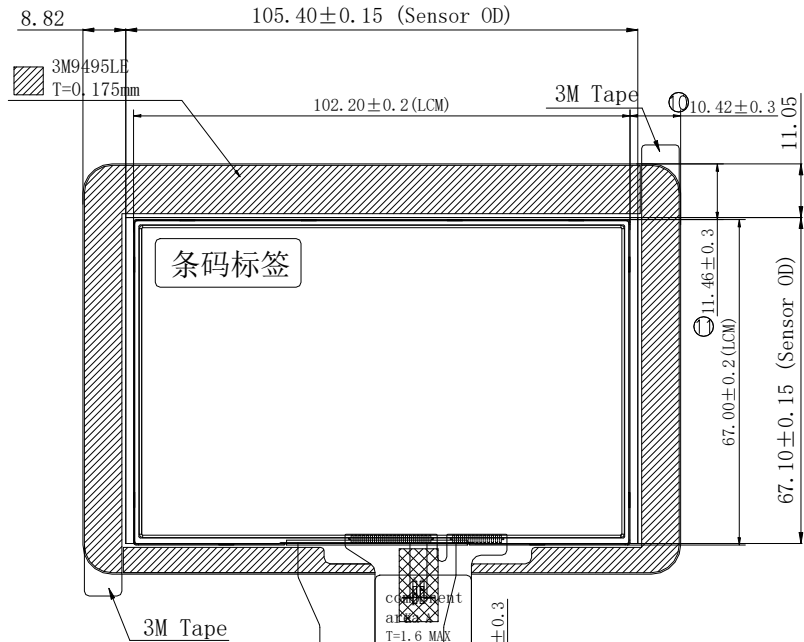


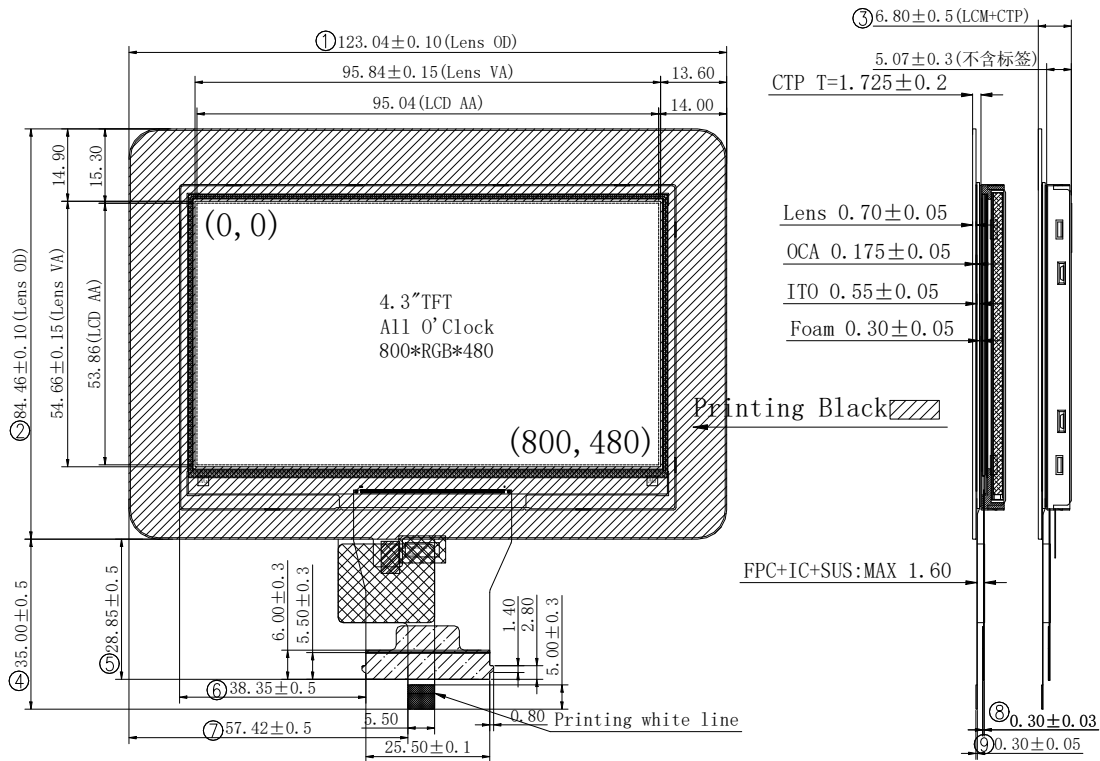

PIN NO	DEFINITION
1	NC
2	NC
3	RST
4	GND
5	INT
6	SDA(3.3V)
7	SCL(3.3V)
8	GND
9	GND
10	VDD(3.3V)

- NOTES:
- GENERAL TOLERANCE: ± 0.2
 - () REFERENCE DIMENSION
 - Important dimension: ①~⑪

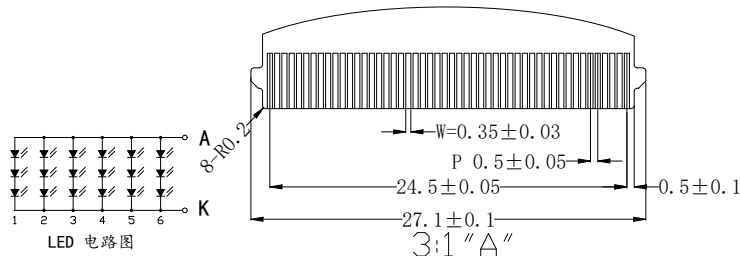

LCD Type	4.3" TFT, Transmissive
Resolution	800(RGB)*480
View Direction	All o'clock
LCD driver IC	ST7262E43
Color depth	16.7M
Interface types	RGB24-bit
Operating voltage	VDD=3.3V
With TP/Lens	with ttp(F15440006)
Backlight	18 LEDs, 240mA(typ), 9.6V(ref.)
Surface luminance	720-800 cd/m²(typ)
Operating temperature	-30°C~80°C
Storage temperature	-30°C~80°C
Color chromaticity	[white] x:TBD, y:TBD.

版本 (Version)	变更记录 (Revise History)	日期 (Date)
A0	Initial release	2022.10.12

设计 (DESIGN)	Zahi
审核 (CHECKED)	Aron
批准 (APPROVED)	Aron
客户承认 (CUSTOMER APPROVAL)	

TITLE:	LCM+CTP	页面 (Page)	1 / 1
Drawing No.	TST043WVBS-139C	单位 (Unit)	mm
		比例 (SCALE)	1 : 1
		角度 (Angle)	⊕

1	VLED+
2	VLED+
3	VLED-
4	VLED-
5	GND
6	VCDM
7	VDD
8	MODE
9	DE
10	VSYNL
11	HSYNL
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	SHLR
40	UDDN
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCDM
47	DITHM
48	GND
49	NC
50	NC