

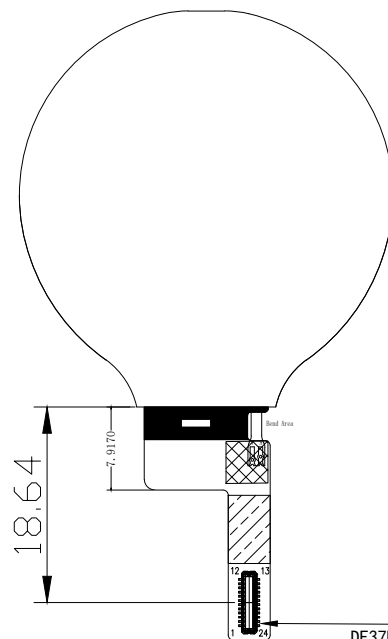



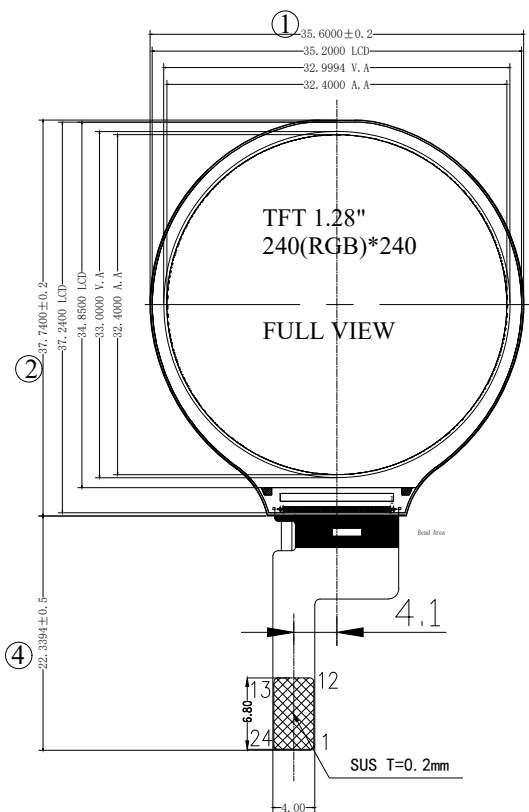

Connector:
DF37B-24DP-0.4V (51)



PIN ASSIGNMENT

PIN	SYMBOL
1	LEDK
2	LEDK
3	GND
4	GND
5	FMARK
6	SDA
7	WR(A0)
8	SCLK
9	CS
10	RESET
11	IDVCC18
12	IDVCC18
13	VCC28
14	VCC28
15	GND
16	GND
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	LEDA
24	LEDA

NOTES:

1. GENERAL TOLERANCE: ± 0.2
2. () REFERENCE DIMENSION
3. Important dimension: ①~④

LCD Type	1.28"TFT,Transmissive
	Normally black
Resolution	240(RGB)*240
View Direction	All O'CLOCK
LCD Driver IC	GC9A01
Color Depth	65K/262K
Interface Types	3line SPI
Operating voltage	2.8V
TP/Lens	Without
Backlight LEDs	2 LEDs, 40mA,3.2V
Surface luminance	300 cd/m ²
Operating temperature	-20 ℃~70 ℃
Storage temperature	-30 ℃~80 ℃

版本 (Version)	变更记录 (Revise History)	日期 (Date)	设计 (DESIGN)	Hcr
AO	Initial release	2020.5.9	审核 (CHECKED)	Aron
			批准 (APPROVED)	Aron
			客户承认 (CUSTOMER APPROVAL)	



TITLE: LCM	页面 (Page) 1 / 1
Drawing No. TST013QVHG-05	单位 (Unit) mm
	比例 (SCALE) 1 : 1
	角度 (Angle) ⊕