



一众显示科技有限公司

TEAM SOURCE DISPLAY TECH. CO, LTD.

TFT-LCDModule Specification

Module NO.: TST090WXHS-06

Version: V1.0

APPROVAL FOR SPECIFICATION APPROVAL FOR SAMPLE

For Customer's Acceptance:	
Approved by	Comment

Team Source Display:		
Presented by	Reviewed by	Approved by
San	Aron	Aron

Version No.	Date	Content	Remark
V1.0	2023-07-28	Initial Release	



1.0	GENERAL DESCRIPTION	4
2.0	ABSOLUTE MAXIMUM RATINGS	5
3.0	OPTICAL CHARACTERISTICS	6
4.0	BLOCK DIAGRAM.....	10
5.0	INTERFACE PIN CONNECTION	12
6.0	ELECTRICAL CHARACTERISTICS.....	16
7.0	RELIABILTY TEST ITEMS.....	24
8.0	OUTLINE DIMENSION.....	25



1.0 GENERAL DESCRIPTION

1.1 Introduction

TSD Display model TST090WXHS-06 is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a backlight system. This TFT LCD has a 9" (16:9) inch diagonally measured active display area with HD (1280 horizontal by 720 vertical pixel) resolution.

1.2 Features

- . 9 (16:9 diagonal) inch configuration
- . 16.7M color by 8 bit
- . ROHS / Halogen Free Compliance

1.3 Applications

- Automotive

1.4 General information

Item		Specification	Unit
Outline Dimension		210.7(H) x 124.1(V) x 6.2 (Typ.)	mm
Display area		198.912(H) x 111.888(V)	mm
Number of Pixel		1280 RGB (H) x 720(V)	pixels
Pixel pitch		0.1554(H) x 0.1554(V)	mm
Pixel arrangement		RGB Vertical stripe	
Display mode		Normally Black	
NTSC		70 (Typ.)	%
Surface treatment		AG, Hard-Coating (3H)	
Weight		225 (Typ.)	g
Back-light		27pcs (9S3P)	
Power Consumption	Logic System	2 (Max)	W
	B/L System	7.344 (Max.)	W

1.5 Mechanical Information

Item		Min.	Typ.	Max.	Unit
Module Size	Horizontal (H)	210.4	210.7	211.0	mm
	Vertical (V)	123.8	124.1	124.4	mm
	Depth (D)	5.9	6.2	6.5	mm
Weight		-	225	235	g

2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Electrical Absolute Rating

2.1.1 TFT LCD Module

Parameters	Symbol	Min.	Max.	Unit	Note
Power Supply voltage	VDD	-0.3	5	V	
	AVDD	-0.5	15	V	
	VGH	-0.3	42	V	
	VGL	-20	0.3	V	
	VGH-VGL	-0.3	40	V	

2.2 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Operating Temperature	T _{opa}	-40	85	°C	
Storage Temperature	T _{stg}	-40	90	°C	

3.0 OPTICAL CHARACTERISTICS

3.1 Optical specification

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note	
Contrast	CR	° =0 Normal viewing angle	600	900	–		(1)(2)	
Response time	T _R + T _F		–	30	40	msec	(1)(3)	
White luminance (Center)	Y _L		650	800	–	–	(1)(4) (I _L =240mA)	
Color chromaticity (CIE1931)	White		W _x	0.263	0.303	0.343		(1)(4)
			W _y	0.283	0.323	0.363		
	Red		R _x	0.619	0.649	0.679		
			R _y	0.302	0.332	0.362		
	Green		G _x	0.264	0.294	0.324		
			G _y	0.580	0.610	0.640		
	Blue		B _x	0.118	0.148	0.178		
		B _y	0.025	0.055	0.085			
Viewing angle	Hor.	° L	75	85	–			
		° R	75	85	–			
	Ver.	° U	75	85	–			
		° D	75	85	–			
Brightness uniformity	B _{UNI}	° =0	70	80	–	%	(5)	
Optima View Direction			Free				(6)	


3.2 Measuring Condition

- . Measuring surrounding: dark room
- . LED current I_L : 240mA
- . Ambient temperature: 25±2°C
- . 15min. warm-up time.

3.3 Measuring Equipment

- . FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- . Measuring spot size: 20 ~ 21 mm


Note (1) Definition of Viewing Angle:

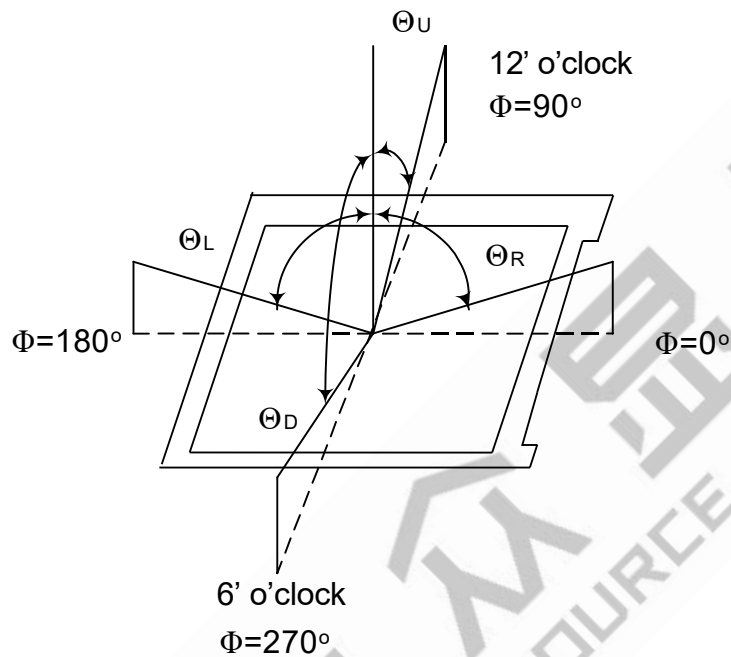


Note (2) Definition of Contrast Ratio (CR) :
measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$


Note (3) Definition of Response Time : Sum of T_R and T_F

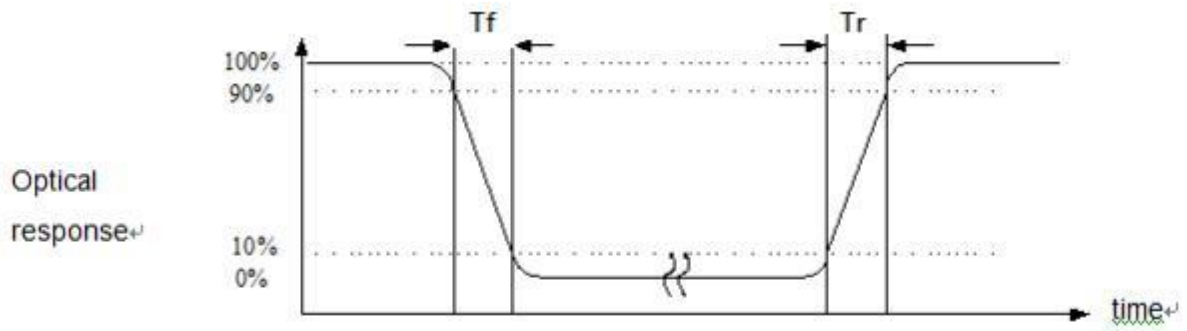

Note (4) Definition of optical measurement setup

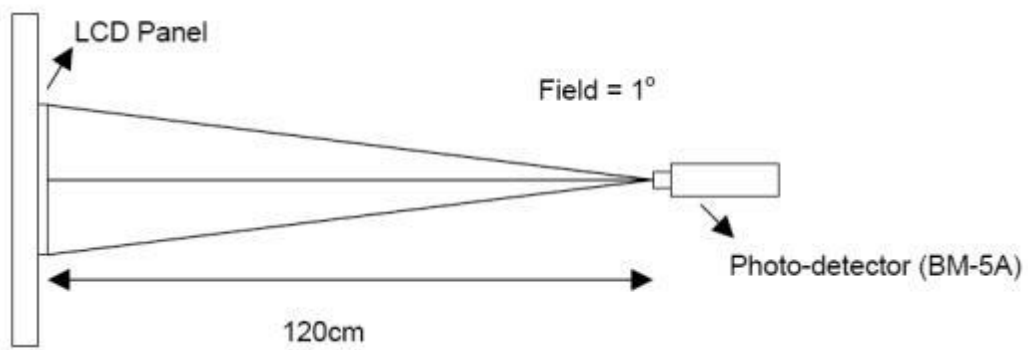

Note (5) Definition of brightness uniformity

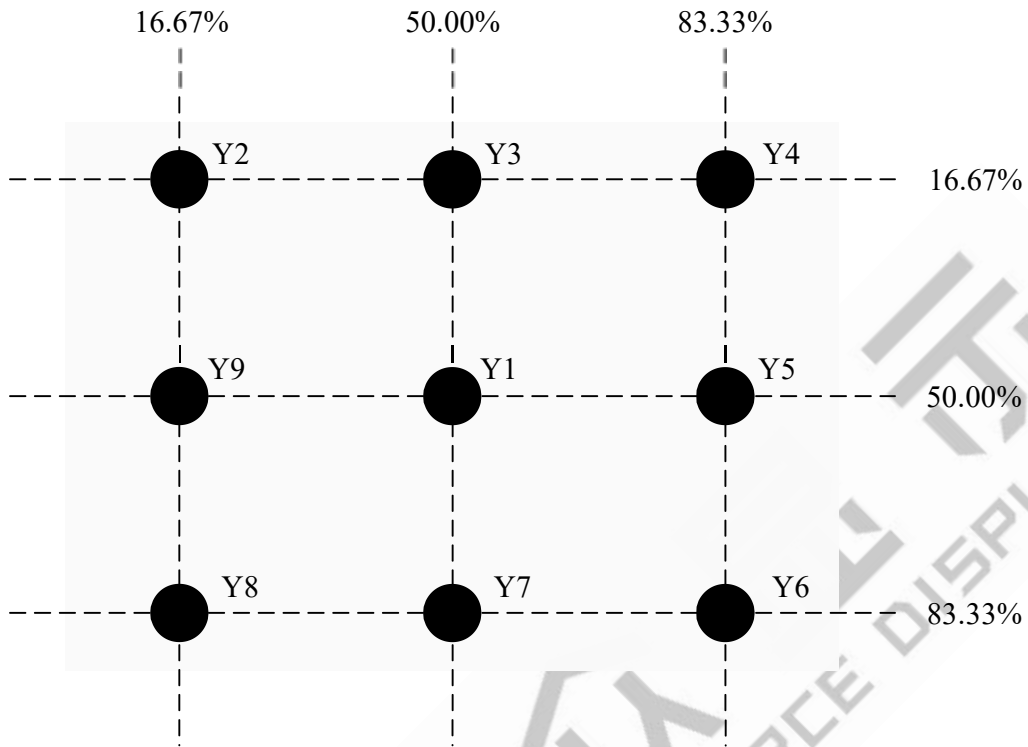


$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})} \times 100\%$$


Note (6): Rubbing Direction (The different Rubbing Direction will cause the different optima view direction.)

4.0 BLOCK DIAGRAM

4.1 TFT LCD Module:

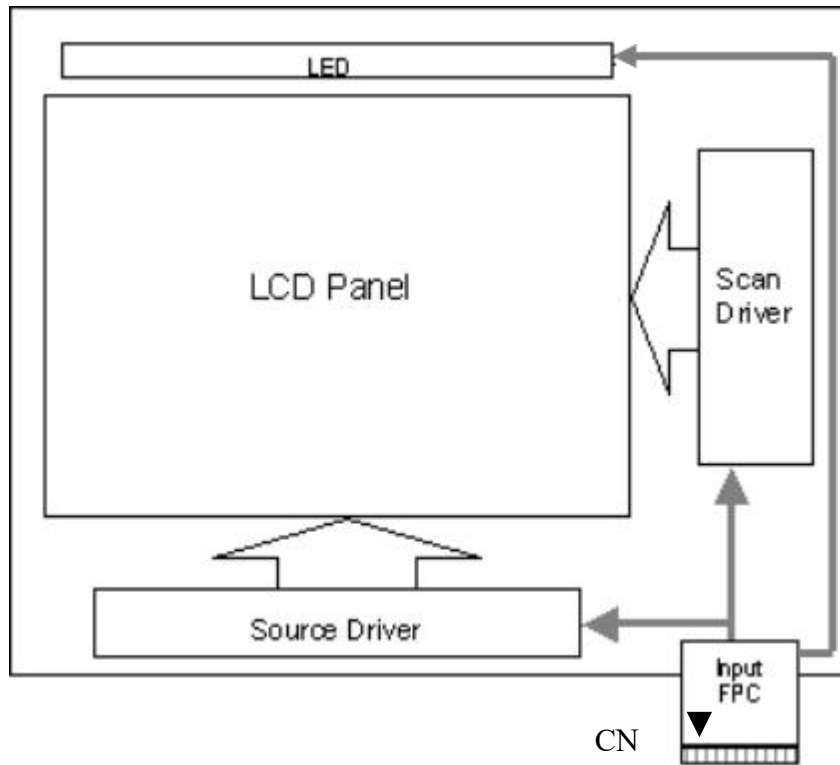

4.2 Pixel Format

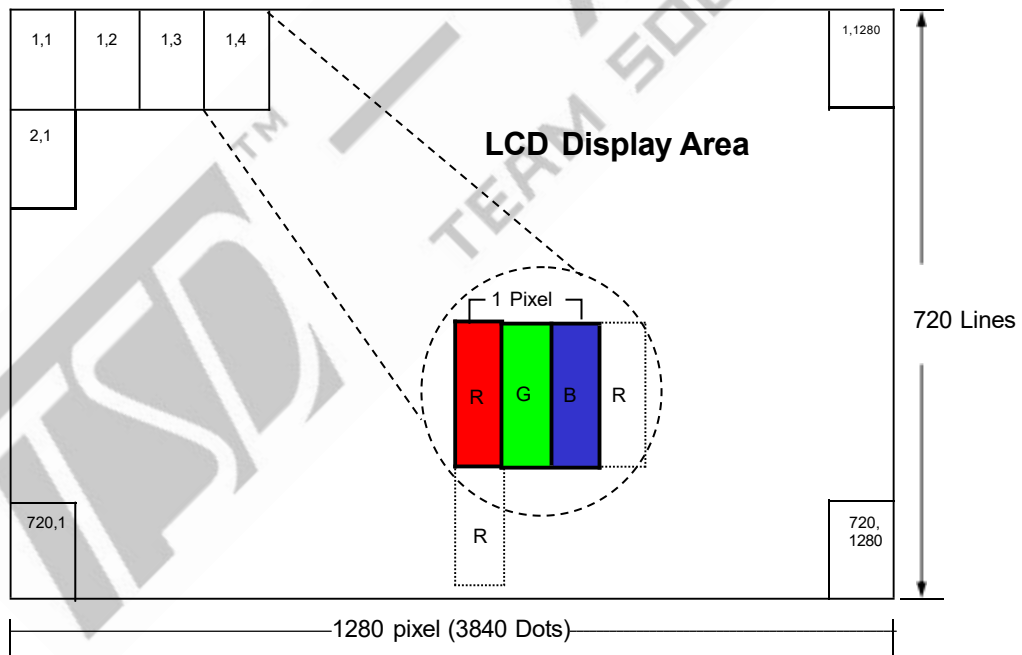

4.3 Relationship Between Displayed Color and Input

	Display	MSB								LSB								Grayscale Level								
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0		B7	B6	B5	B4	B3	B2	B1	B0
Basic color	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	-
	Green	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	-
	Light Blue	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-
	Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-
	Purple	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	-
	Yellow	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	-
	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-
Grayscale of Red	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1
		L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251
		H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L252
	H	H	H	H	H	H	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L253	
	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L254	
	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	Red L255	
Red	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	Red L255		
Grayscale of Green	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1
		L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251
		L	L	L	L	L	L	L	L	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L252	
	L	L	L	L	L	L	L	L	H	H	H	H	H	L	H	L	L	L	L	L	L	L	L	L253		
	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L254		
	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	Green L255		
Green	L	L	L	L	L	L	L	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	Green L255			
Grayscale of Blue	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L1
		L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	L	L	L	L252
	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	L	H	L	L253	
	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L254	
	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	Blue L255	
Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	Blue L255		
Grayscale of White & Black	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	H	L	L	L	L	L	L	H	L	L	L	L	L	L	L	H	L1		
		L	L	L	L	L	L	H	L	L	L	L	L	H	L	L	L	L	L	L	L	H	L2			
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251			
		H	H	H	H	H	L	L	H	H	H	H	L	L	H	H	H	H	L	L	H	H	H	H	L	L
	H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	H	L253
	H	H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	L254
	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	White L255	
White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	White L255	

5.0 INTERFACE PIN CONNECTION

5.1 FPC Pin Assignment:

FPC connector is used for electronics interface. The recommended model is FH52-60S-0.5SH manufactured by HIROSE

Pin No.	Symbol	Description	Note
1	AGND	Analog ground	
2	AVDD	Analog power	
3	DVDD	Digital power	
4	GND	Digital ground	
5	NC	No connection	
6	DVDD	Digital power	
7	GND	Digital ground	
8	NC	No connection	
9	NC	No connection	
10	NC	No connection	
11	NC	No connection	
12	NC	No connection	
13	NC	No connection	
14	NC	No connection	
15	GND	Digital ground	
16	DVDD_LVDS	LVDS power	
17	GND	Digital ground	
18	PIND3	Positive LVDS differential data input	
19	NIND3	Negative LVDS differential data input	
20	GND	Digital ground	
21	PINC	Positive LVDS differential clock input	
22	NINC	Negative LVDS differential clock input	
23	GND	Digital ground	
24	PIND2	Positive LVDS differential data input	
25	NIND2	Negative LVDS differential data input	
26	GND	Digital ground	
27	PIND1	Positive LVDS differential data input	

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Pin No.	Symbol	Description	Note
28	NIND1	Negative LVDS differential data input	
29	GND	Digital ground	
30	PIND0	Positive LVDS differential data input	
31	NIND0	Negative LVDS differential data input	
32	GND	Digital ground	
33	GND_LVDS	Digital ground	
34	GRB	Global reset pin. Active low to enter reset state. Suggest to connecting with an RC reset circuit for stability. Normally pull high. (R=10KΩ , C=0.1μF)	
35	STBYB	Standby mode, normally pull high STBYB="1", normal operation STBYB="0", timing control, source driver will turn off, all output are high-Z	
36	SHLR	Left or right display control	1
37	DVDD	Digital power	
38	UPDN	Up / down display control	1
39	AGND	Analog ground	
40	AVDD	Analog power	
41	NC	No connection	
42	NC	No connection	
43	GND	Digital ground	
44	DVDD	Digital power	
45	GND	Digital ground	
46	NC	No connection	
47	NC	Let it open. HSD used for SPI function	
48	NC	Let it open. HSD used for SPI function	
49	NC	Let it open. HSD used for SPI function	
50	NC	Let it open. HSD used for SPI function	
51	GND	Please connect to ground. (HSD used for EEPROM function)	
52	NC	No connection	
53	GND	Digital ground	
54	DVDD	Digital power	

Pin No.	Symbol	Description	Note
55	SELB	6bit/8bit mode select, SELB = "1", LVDS input data is 8bits SELB = "0", LVDS input data is 6bits	2
56	VGH	Positive power for TFT	
57	DVDD	Digital power for Gate IC	
58	VGL	Negative power for TFT	
59	GND	Digital ground	
60	BIST	Normal operation/BIST pattern select. BIST="1": BIST mode. BIST="0": Normal operation.	

Note1:

When L/R="0", set right to left scan direction

When L/R="1", set left to right scan direction

When U/D="0", set bottom to top scan direction


When U/D="1", set top to bottom scan direction

Note2:

If LVDS input data is 8 bits, SELB must be set to High

If LVDS input data is 6 bits, SELB must be set to Low

SHLR	UPDN	Data shifting
DVDD	GND	Left→Right→Down→Up
GND	GND	Right→Left; Down→Up
DVDD	DVDD	Left→Right; Up→Down(default)
GND	DVDD	Right→Left; Up→Down

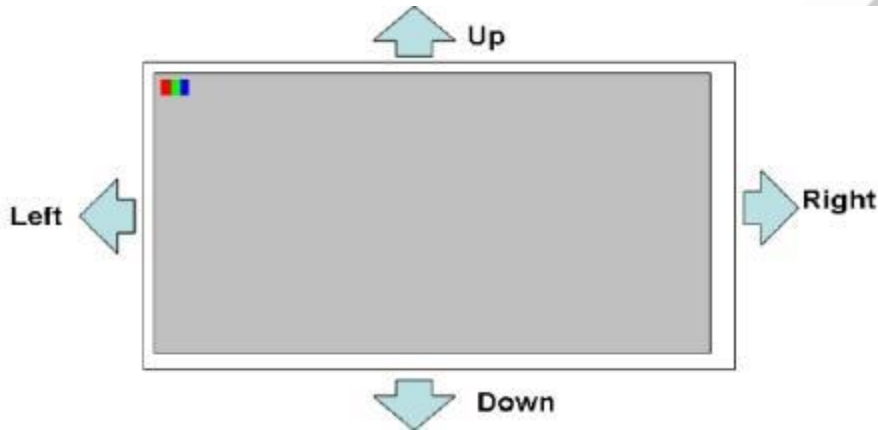

5.2 LED Board Pin Assignment:

FPC connector is used for LED FPC. The recommended model is FH52-10S-0.5SH manufactured by HIROSE

Pin NO.	Function	Remark
1	ANODE	A (+)
2	ANODE	A (+)
3	ANODE	A (+)
4	NC	NC
5	NC	NC
6	NC	NC
7	CATHODE1	K1 (-)
8	CATHODE2	K2 (-)
9	CATHODE3	K3 (-)
10	NC	NC

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

6.0 ELECTRICAL CHARACTERISTICS

6.1 TFT LCD Module

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	VDD	3.0	3.3	3.6	V	
	VGH	19	20	21	V	Note (1)
	VGL	-11	-10	-9	V	Note (2)
	AVDD	12.3	12.4	12.5	V	
Input signal voltage	ViH	0.7 VDD	-	VDD	V	
	ViL	GND	-	0.3 VDD	V	
Current of power supply	IDD	-	30	39	mA	VDD =3.3V / Note (3)
	IADD	-	50	65	mA	AVDD=12.4V / Note (3)
	IGH	-	1	1.3	mA	VGH=20V / Note (3)
	IGL	-	1	1.3	mA	VGL=-10V / Note (3)


Note :

- (1): VGH is TFT Gate operating Voltage.
- (2): VGL is TFT Gate operating Voltage.
- (3): @ White Pattern & 60Hz .


6.2 LVDS Interface DC Characteristic

Item	Symbol	Min.	Typ.	Max.	Unit
Differential Input High Threshold Voltage	R_{XVTH}	-	-	200	mV
Differential Input Low Threshold Voltage	R_{XVTL}	-200	-	-	mV
Differential Input Common Mode Voltage	R_{XVCM}	1.0	1.2	$1.7- V_{ID} /2$	V
Differential input Voltage	$ V_{ID} $	200	-	600	mV

Single-end Signal

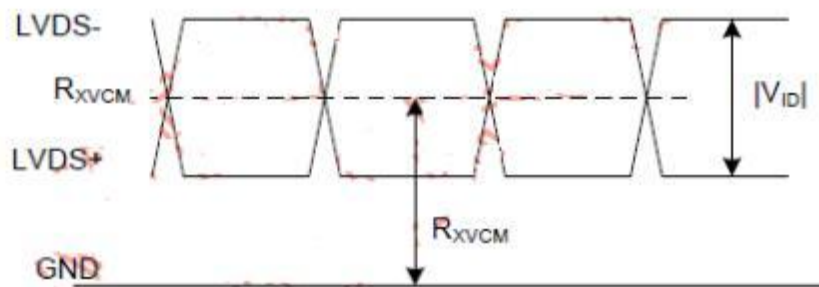


Differential Signal

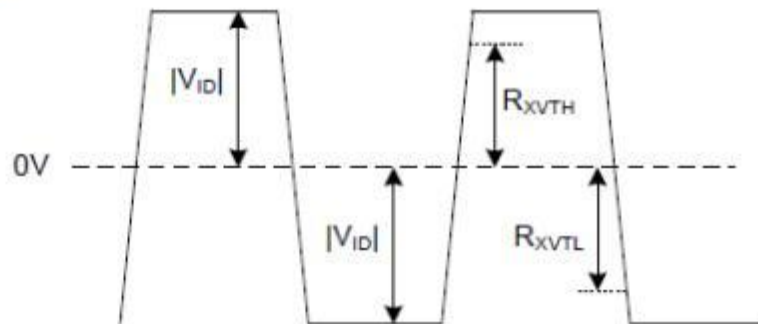

LVDS DC Diagram


6.3 LVDS Input Timing

Item	Symbol	Min.	Typ.	Max.	Unit
Clock Period	tRCP	Refer to input timing table			
1 data bit time	UI	-	1/7	-	tRCP
Clock high time	tRCH	-	4	-	UI
Clock low time	tRCL	-	3	-	UI
Input Position 1	tRIP1	-0.25	0	0.25	UI
Input Position 0	tRIP0	0.75	1	1.25	UI
Input Position 6	tRIP6	1.75	2	2.25	UI
Input Position 5	tRIP5	2.75	3	3.25	UI
Input Position 4	tRIP4	3.75	4	4.25	UI
Input Position 3	tRIP3	4.75	5	5.25	UI
Input Position 2	tRIP2	5.75	6	6.25	UI

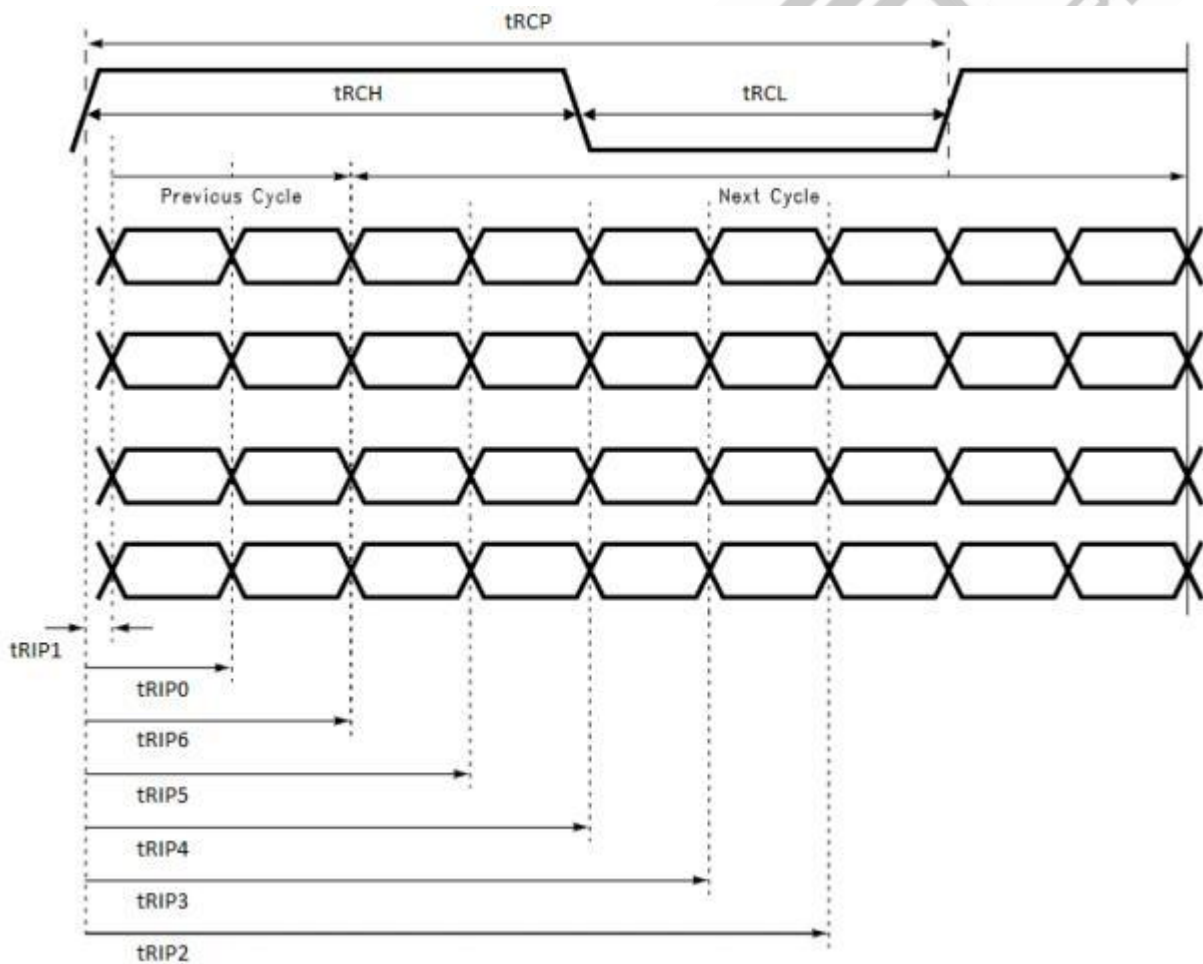


6.4 LVDS Data Skew

Item	Symbol	Min.	Typ.	Max.	Unit
Strobe width	tEYEW	0.5		-	UI
Input data skew margin	tEX	-		0.25	UI

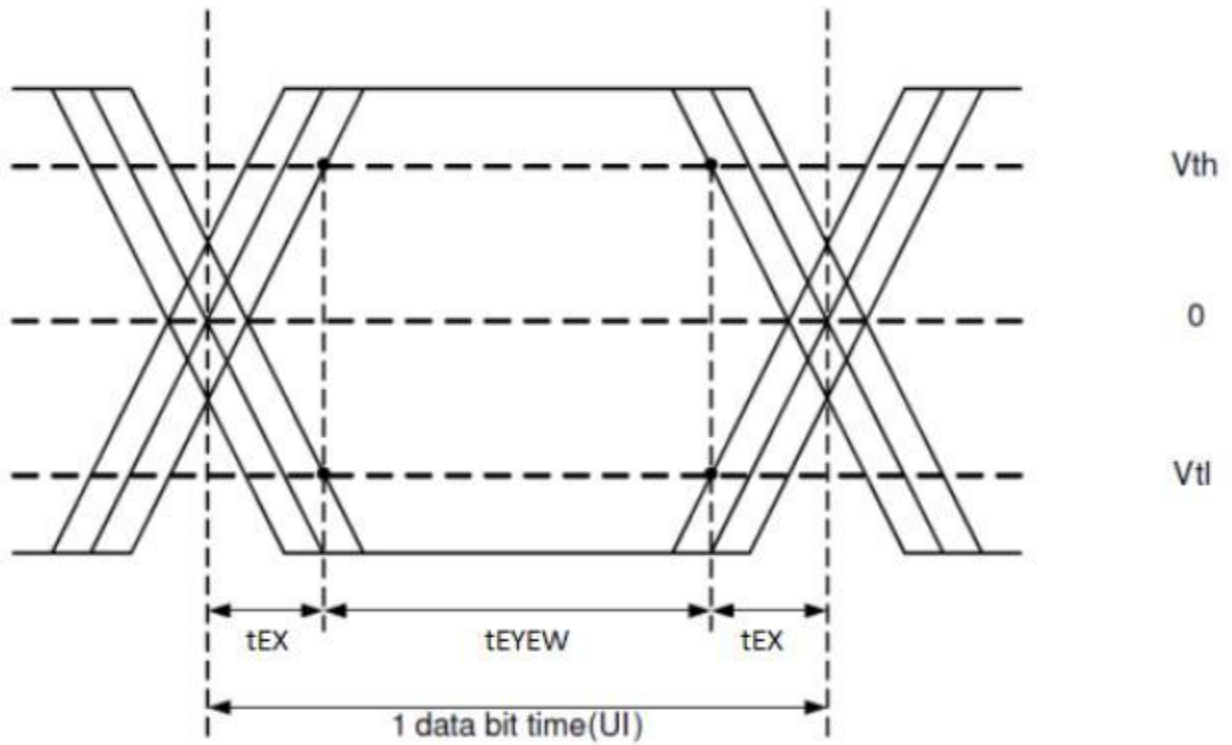


6.5 Bit LVDS input

6.5.1 6bit LVDS input

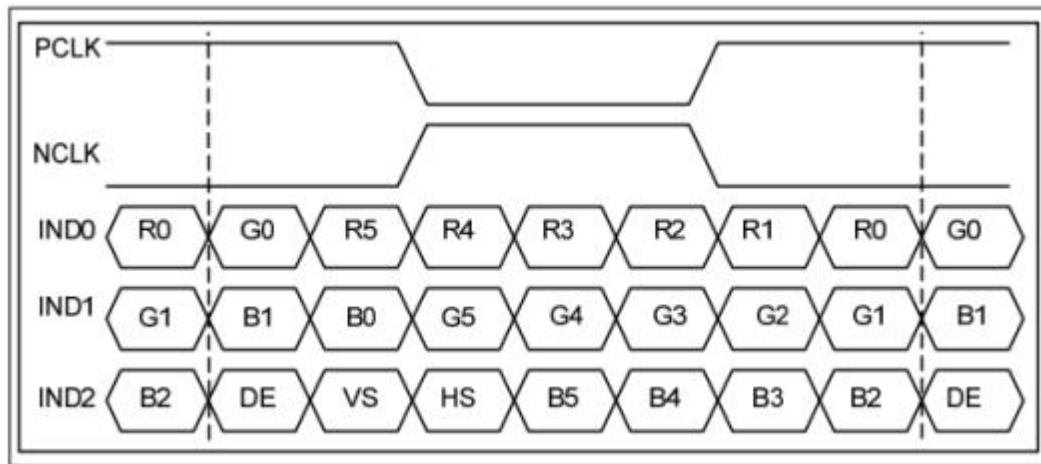


6.5.2 8Bit LVDS input

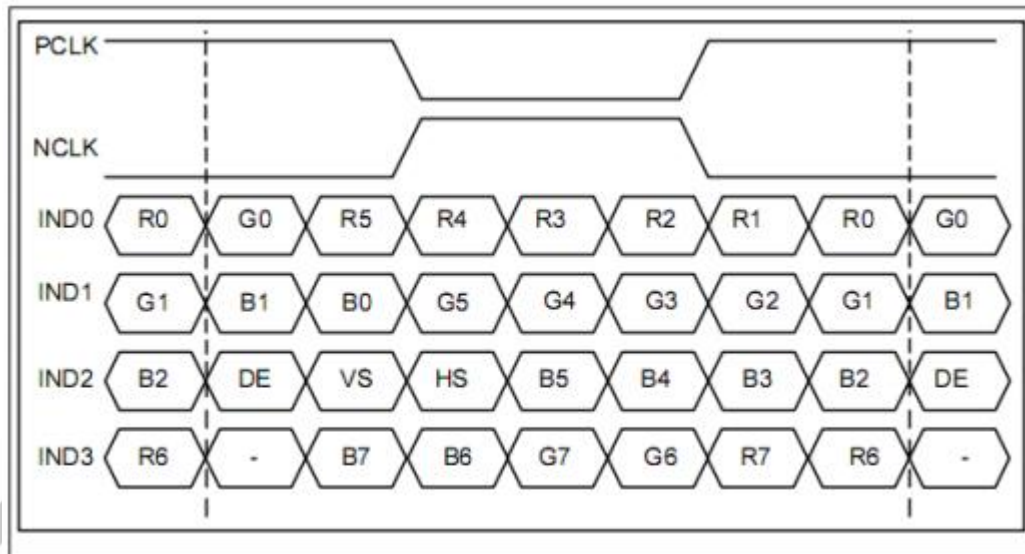

6.6 Interface Timing (DE mode)


Item	Symbol	Min.	Typ.	Max.	Unit
Frame Rate	--	58	60	62	Hz
Vertical Total Time	T_V		738		line
Vertical Display Time	T_{VD}		720		line
Vertical Blanking Time	$T_{VBP} + T_{VFP}$		18		line
Horizontal Total Time	T_H		1344		clock
Horizontal Display Time	T_{HD}		1280		clock
Horizontal Blanking Time	$T_{HBP} + T_{HFP}$		64		clock
Clock Rate	$1/T_{Clock}$	57.5	59.5	61.5	MHz

Timing Diagram of Interface Signal (DE mode)

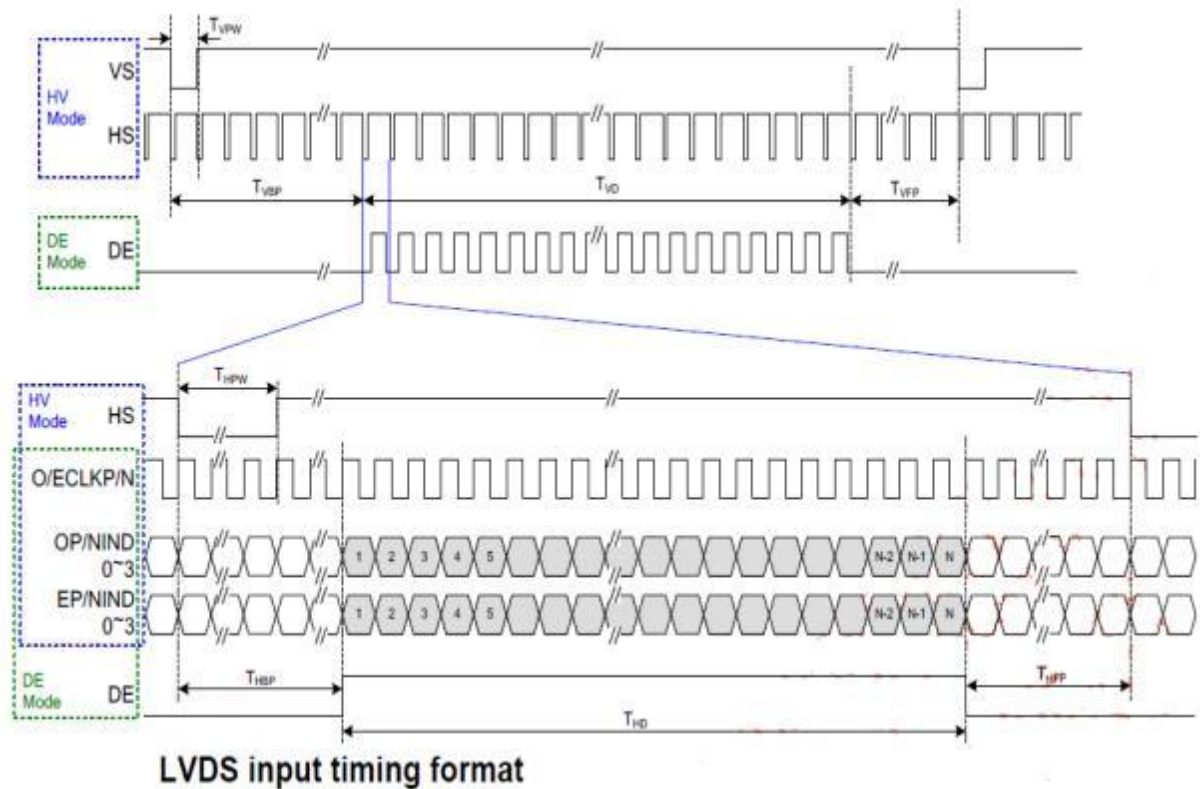


6.7 Power On / Off Sequence

Power on Sequence

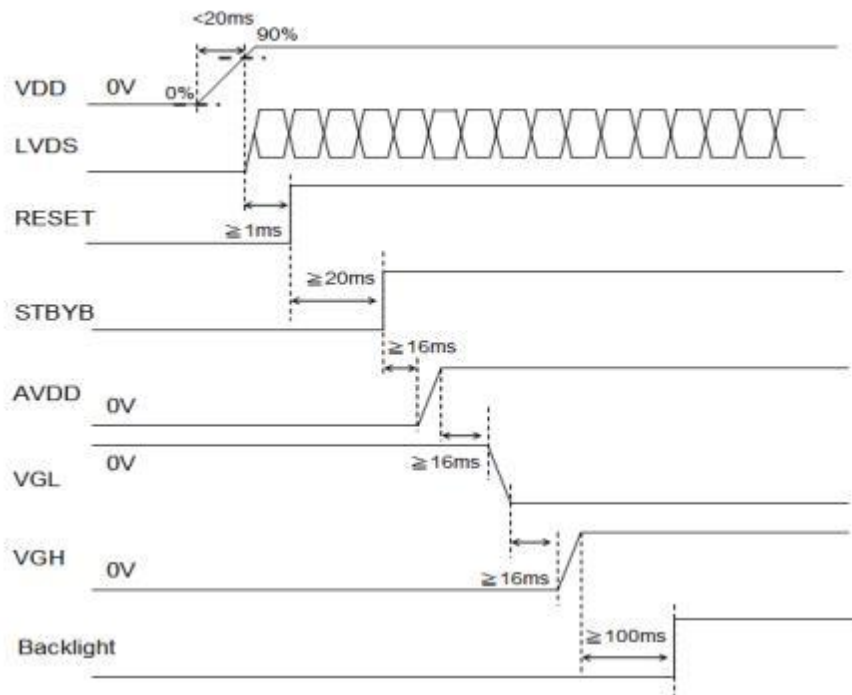

Power off Sequence

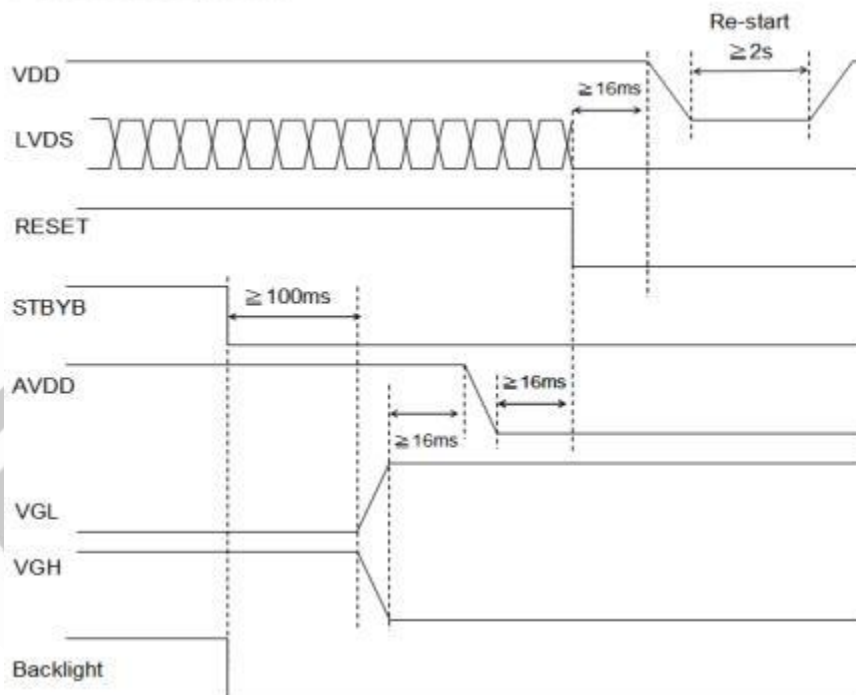


6.8 Backlight Unit

Parameter	Symbol	Min	Typ	Max	Units	Condition
LED Current	I_L	--	240	--	mA	$T_a=25^{\circ}\text{C}$
LED Voltage	V_F	--		30.6	Volt	$T_a=25^{\circ}\text{C}$
LED Life-Time	N/A	30,000	--	--	Hour	$T_a=25^{\circ}\text{C}$ $I_L=240\text{mA}$ Note (2)

Note (1) LED lifetime (Hr) can be defined as the time in which it continues to operate under the condition: $T_a=25\pm 3^{\circ}\text{C}$, typical I_L value indicated in the above table until the brightness becomes less than 50%.

Note (2) The "LED lifetime" is defined as the module brightness decrease to 50% original brightness at $T_a=25^{\circ}\text{C}$ and $I_L=240\text{mA}$. The LED lifetime could be decreased if operating I_L is larger than 240mA. The constant current driving method is suggested.

Note (3) LED Light Bar Circuit

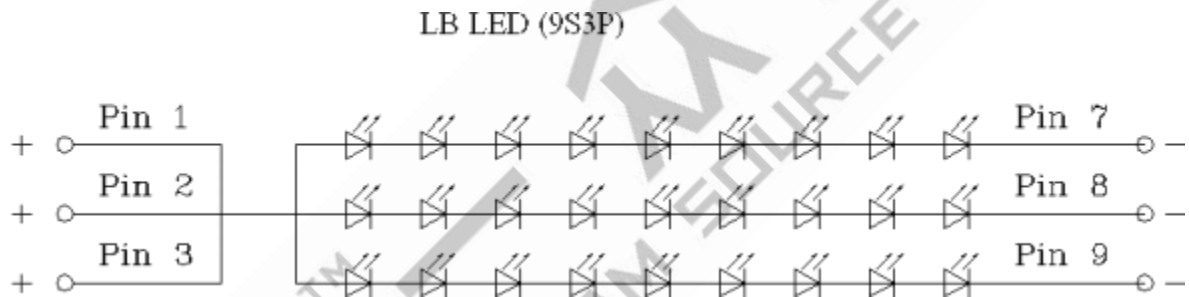

7.0 RELIABILITY TEST ITEMS

No.	Item	Conditions	Remark
1	High Temperature Storage	Ta = +90°C, 500hrs	1, 2, 3
2	Low Temperature Storage	Ta = -40°C, 500hrs	1, 2, 3
3	High Temperature Operation	Ta = +85°C, 500hrs	1, 2, 3
4	Low Temperature Operation	Ta = -40°C, 500hrs	1, 2, 3
5	High Temperature and High Humidity (operation)	Ta = +60°C, 90%RH, 500hrs	1, 2, 3
6	Thermal Cycling Test (non operation)	-30°C(30min) → +85°C(30min), 100 cycles	1, 2, 3
7	Electrostatic Discharge	R=330Ω,C=150pF Contact = ± 8 kV, class B; Air = ± 15 kV, class B; 1 time for each point.	
8	Vibration	1.Random: 1.04G, 5~500Hz, XYZ, 30min/each direction 2.Sine: Freq. Range: 8~33.3Hz, Stoke: 1.3mm Sweep: 2.9G, 33.3~400 X/Z: 2hrs, Y:4hrs	
9	Shock	Half-Sine, 100G, 6ms, ±XYZ, 1time	
10	Vibration (with carton)	Random: 0.015G ² /Hz, 5~200Hz -6dB/Octave, 200~400Hz XYZ 2hrs/each direction	
11	Drop (with carton)	Drop height condition, basis on the product weight and Follow QB100-0027 1 corner, 3 edges, 6 surfaces	

Note1: There is no display function NG issue occurred, all the cosmetic specification is judged before the reliability stress.


Note2: The test result shall be evaluated after the sample has been left at room temperature and humidity for 2 hours without load. No condensation shall be accepted. The sample shall be free from defects:



(Air bubble in the LCD、 Seal leak、 Non-display、 Missing segments、 Glass crack).

Note3: The test condition definition panel's surface temperature.

8.0 OUTLINE DIMENSION

Unit : mm

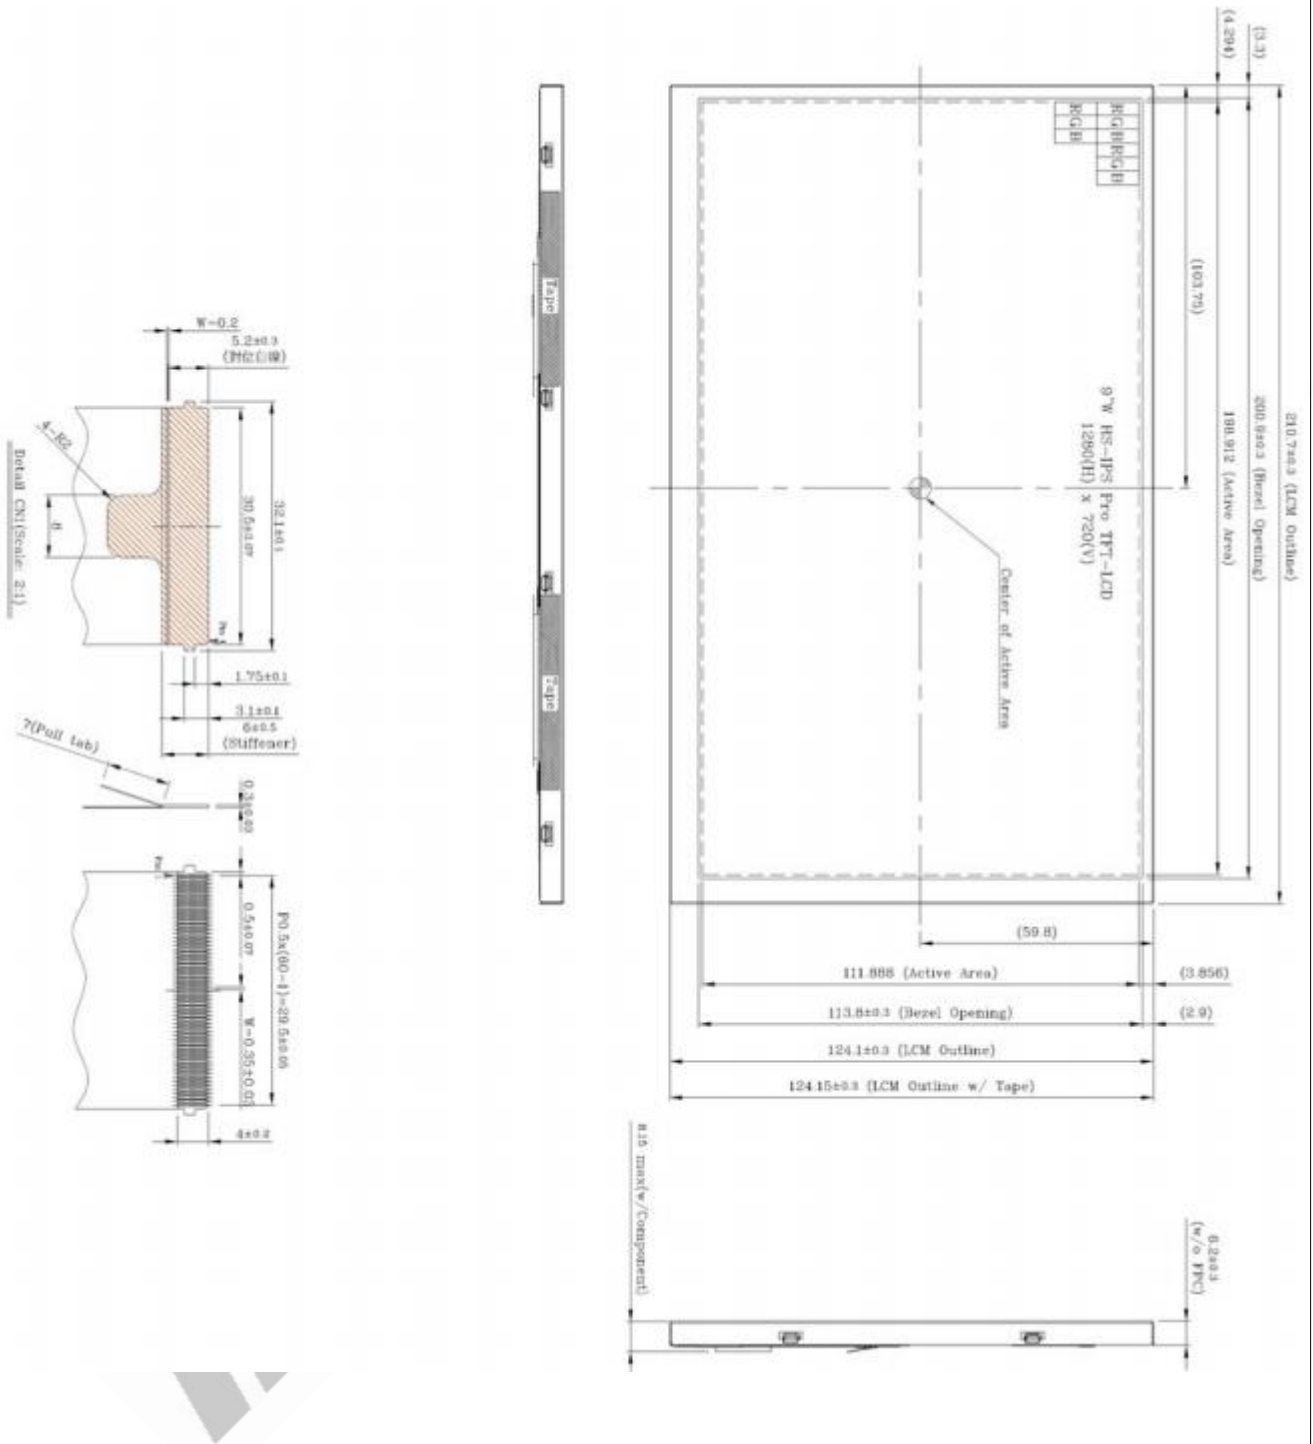

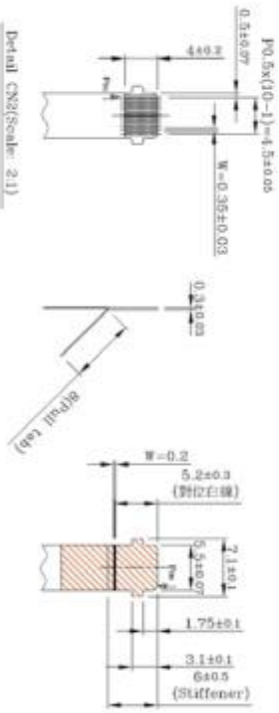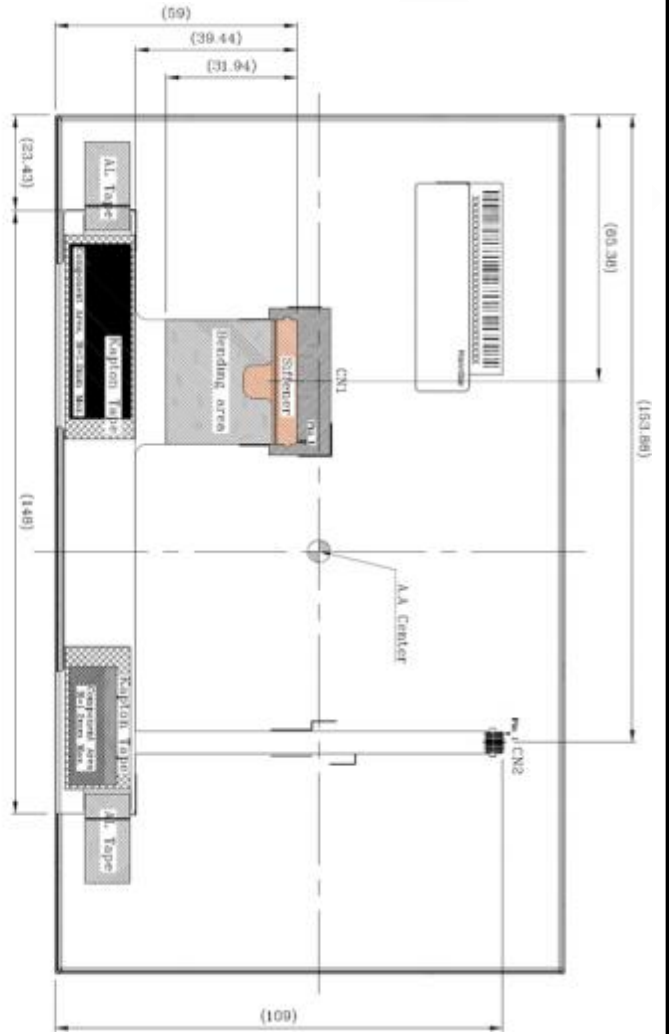

Detail CN2(Scale: 2:1)

CN2

Fig. No.	Symbol
1	A
2	A
3	A
4	NC
5	NC
6	NC
7	SI
8	KE
9	K3
10	NC

