
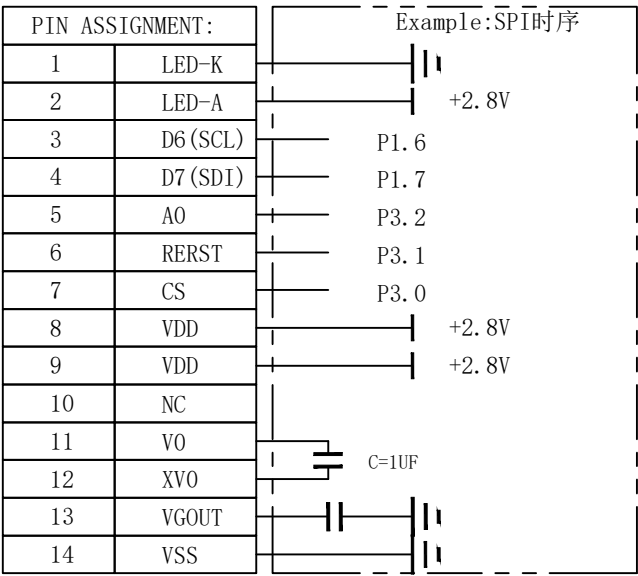
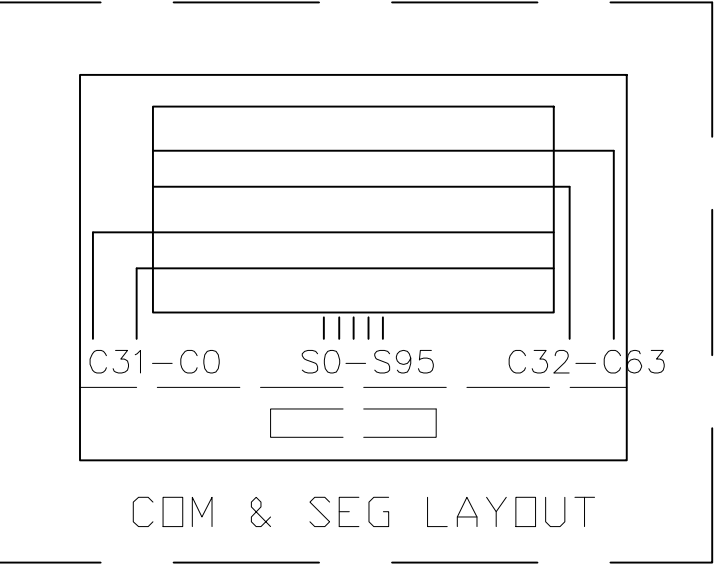
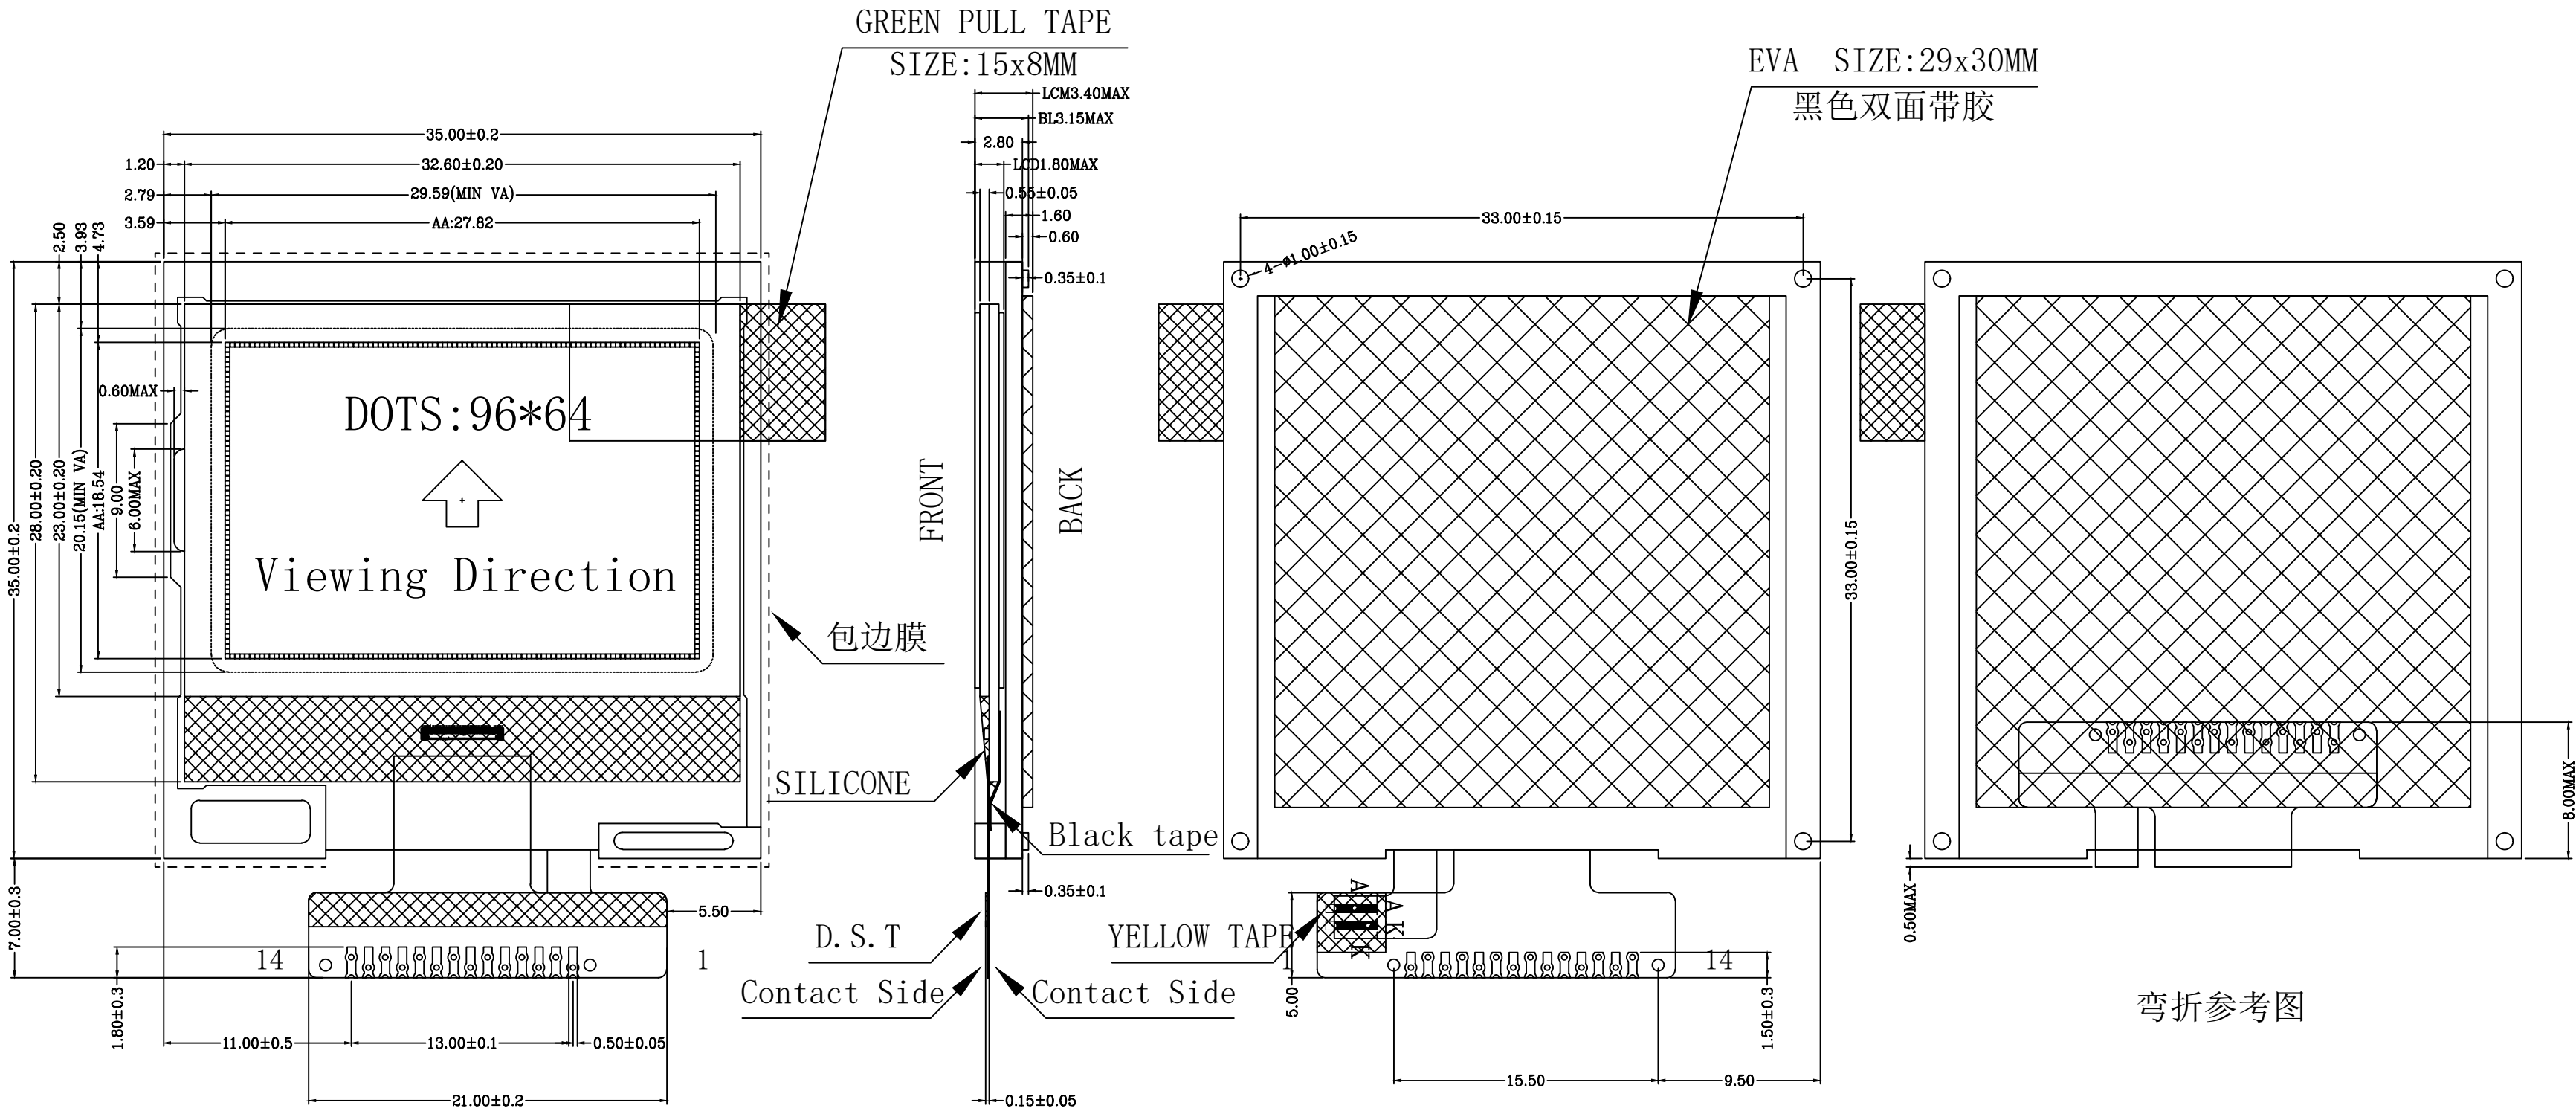


VER	DETAIL DESCRIPTION	DATE
△	The Third Version	2018-06-30

客户确认签名 Customer signature	
------------------------------	--



NOTES:

1.DISPLAY TYPE: FSTN

2.VIEWING DIRECTION: 6:00

3.POLARIZER MODE: TRINSMISSIVE/POSITIVE

4.IC: ST7567(COG)

5.OPERATING TEMP: -20°C~+70°C

6.STORAGE TEMP: -30°C~+80°C

7.Drive Mothod: 1/65duty 1/9bias


8.OPERATING VOLTAGE: VDD=2.8V,VLCD=8.5V

9.BACKLIGHT: VF=2.8V±0.2V,IF=15MA

10.CONNECTOR: COG/FPC


11.UNMARKED TOLERANCES: ±0.2mm

12.REQUIREMENT ON ENVIRONMENTAL PROTECTION: RoHS



DETAIL
SCALE:10:1

Circuit Diagram

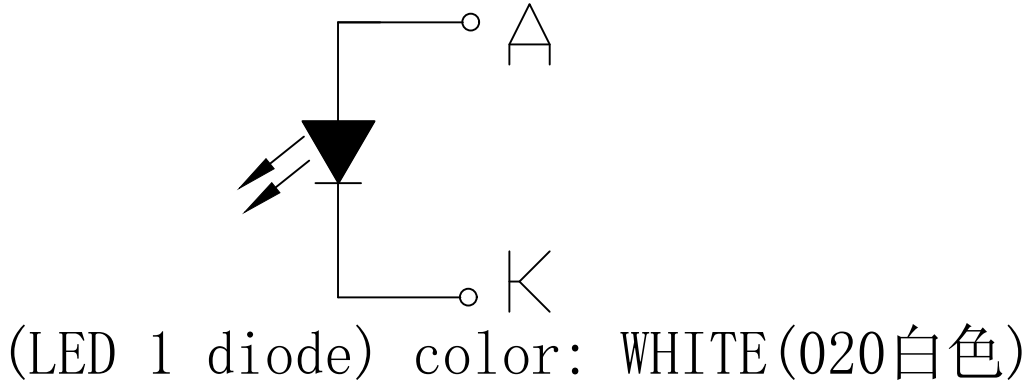

东莞市一众显示科技有限公司 DONG GUAN TEAM SOURCE DISPLAY TECH. CO., LTD.			
名称	LCM工程图		
编号	TSG9664C-0-C		
版本	3 . 0	SHEET	1/1
绘图	KXH	GEN. TOL	±0.20
审批	HWX	PRO (3)	
日期	2 0 1 8 - 0 6 - 3 0		