




Front View

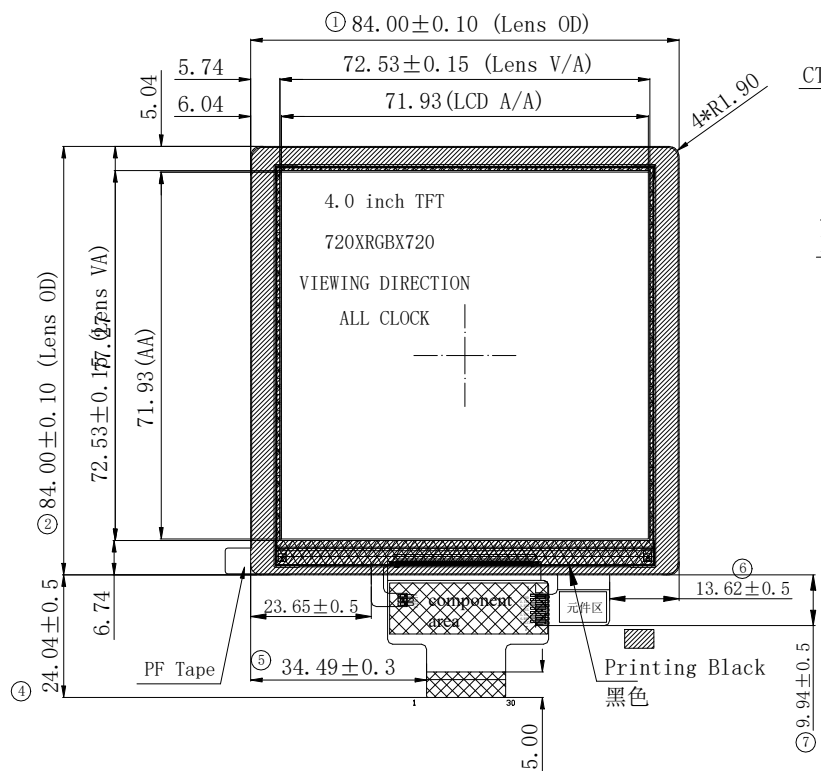


Side View

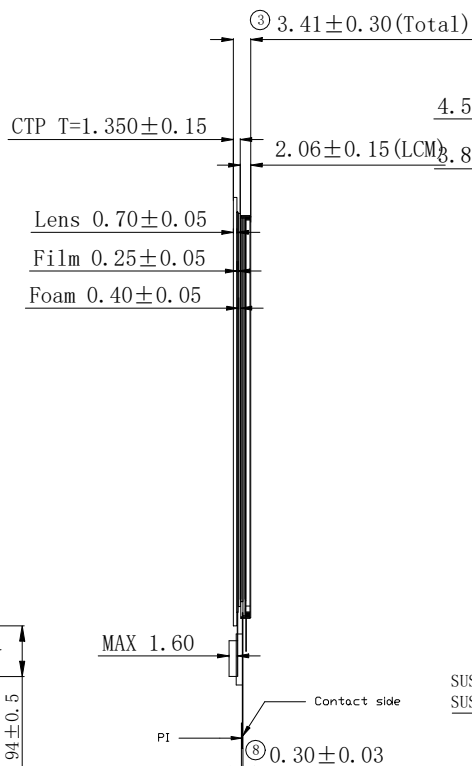

Back View

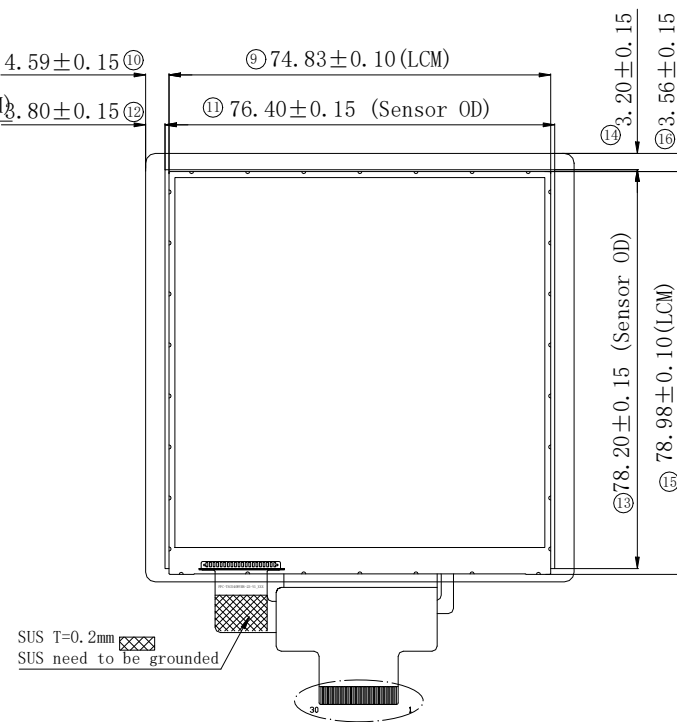

NO.	PIN NAME
1	LED A
2	LED K
3	LED K
4	VCI
5	IDVCC
6	RESET
7	TE
8	PWM
9	GND
10	DOP
11	DON
12	GND
13	D1P
14	D1N
15	GND
16	CLKP
17	CLKN
18	GND
19	D2P
20	D2N
21	GND
22	D3P
23	D3N
24	GND
25	TP INT
26	TP SDA
27	TP SCL
28	TP RESET
29	TP VCI
30	NC



NOTES:

- GENERAL TOLERANCE: ±0.2
- () REFERENCE DIMENSION
- Important dimension: ①~②⑩

LCD Type	4.0" TFT, Transmissive
	Normally Black
Resolution	720(RGB)*720
View Direction	All O'CLOCK
LCD Driver IC	ST7703
Color Depth	262K
LCD Interface	MIPI
Operating voltage	2.8~3.3V
TP/Lens	With CTP(FT6336U)
Backlight LEDs	8 LEDs, 40mA, 15V
Surface luminance	260 cd/m ² (typ)
Operating temperature	-20 °C ~ 70 °C
Storage temperature	-30 °C ~ 80 °C
Color chromaticity	[white] x: 0.3±0.03/y: 0.33±0.03

版本 (Version)	变更记录 (Revise History)	日期 (Date)	设计 (DESIGN)	Zahi
AO	Initial release	2021.12.01	审核 (CHECKED)	Aron
			批准 (APPROVED)	Aron
			客户承认 (CUSTOMER APPROVAL)	

TSD™ 一 众 显 示
TEAM SOURCE DISPLAY

TITLE: LCM+CTP	页面 (Page) 1 / 1
Drawing No. TST040WVBS-34C	单位 (Unit) mm
	比例 (SCALE) 1 : 1
	角度 (Angle) ⊕

