


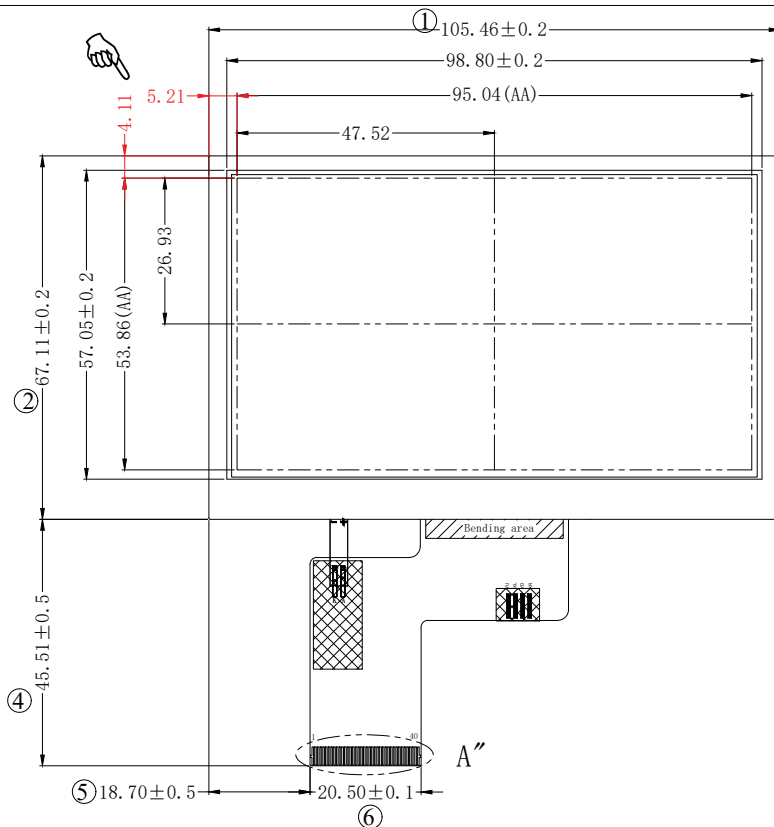

CURRENT: IF=20*2=40mA, 24.8V (REF.)

LCD Type	4.3"TFT,Transmissive
Resolution	Normally white,TN
View Direction	480(RGB)*272
LCD Driver IC	12 O'CLOCK
Color Depth	ST7282
Interface Types	16.7M
Operating voltage	RGB24-bit
TP/Lens	3.3V
Backlight LEDs	Without
Surface luminance	16 LEDs, 40mA,24.8V
Operating temperature	900(min)~1000(typ) cd/m ²
Storage temperature	-20 ℃~70 ℃
	-30 ℃~80 ℃

NOTES:

1. GENERAL TOLERANCE: ± 0.2
2. () REFERENCE DIMENSION
3. Important dimension: ①~⑪

版本 (Version)	变更记录(Revise History)	日期(Date)	设计 (DESIGN)	Bill	TSD™ 一眾显示 TEAM SOURCE DISPLAY	
A0	Initial release	2020.6.10	审核 (CHECKED)	Aron		
			批准 (APPROVED)	Aron	TITLE:	页面 (Page) 1 / 1
			客户承认 (CUSTOMER APPROVAL)		LCM	单位 (Unit) mm
					Drawing No.	比例 (SCALE) 1 : 1
					TST043WQIS-88	角度 (Angle)

PIN	DESCRIPTION
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSNC
34	DEN
35	NC
36	GND
37	RX (NC)
38	YD (NC)
39	XL (NC)
40	YU (NC)

