



深圳市一众显示科技有限公司

SHEN ZHEN TEAM SOURCE DISPLAY TECH. CO, LTD.

TFT-LCD Module Specification

Module NO.: TST022EY-01S

Version: V1.0

APPROVAL FOR SPECIFICATION

APPROVAL FOR SAMPLE

For Customer' s Acceptance:	
Approved by	Comment

Team Source Display:		
Presented by	Reviewed by	Organized by





Version No.	Date	Content	Remark
V1.0	2019-1-9	Initial Release	

CONTENTS


- 1. General Features & Mechanical Specifications**
- 2. Outline Drawing**
- 3. Absolute Maximum Ratings**
- 4. Electrical Characteristics**
- 5. Interface Pin Connection**
- 6. Electro-optical Characteristics**
- 7. Standard Specification For Reliability**
- 8. Quality Assurance**
- 9. Precautions For using LCD Module**
- 10. Limited Warranty**
- 11. Important Notice**

1. General Features & Mechanical Specifications.

Item	Contents	Unit
LCD Type	a-Si TFT-color transmissive LCD	-
Display Format	RGB Stripe	-
Display color	262K color	-
Input Data	4 wires Serial Peripheral Interface	-
Viewing Direction	12 O'clock	-
Backlight	White(3x LED)	-
Driver IC	ILI9225G	pixel
Resolution	176(RGB)x220	-
Dimensional outline	40.30(W)x55.26(H) x3.65(T)	mm
Active area	34.85(W) x 43.56(H)	mm
Pixel Pitch	0.198(W)x 0.198(H)	mm
Diagonal length	2.2 "	inch
Operating Temp.	-20°C ~ + 70°C	°C
Storage Temp.	-30°C ~+ 80°C	°C

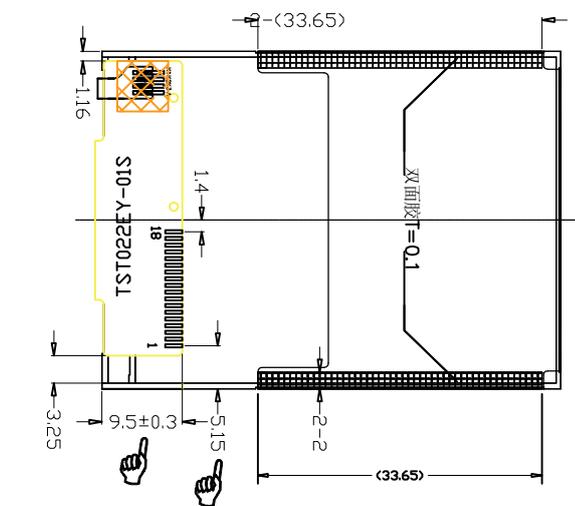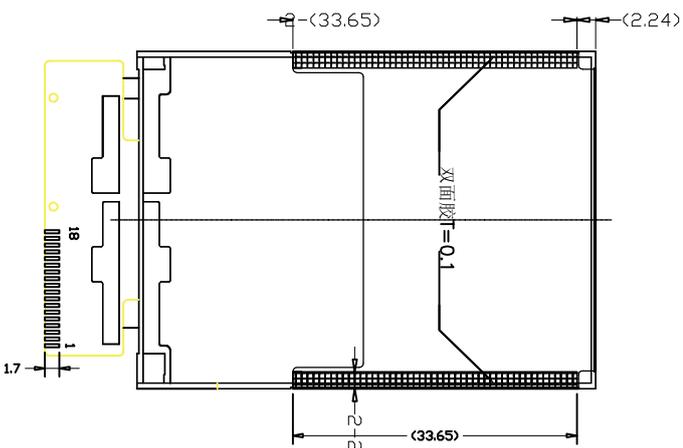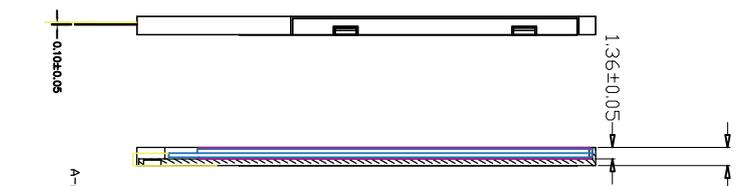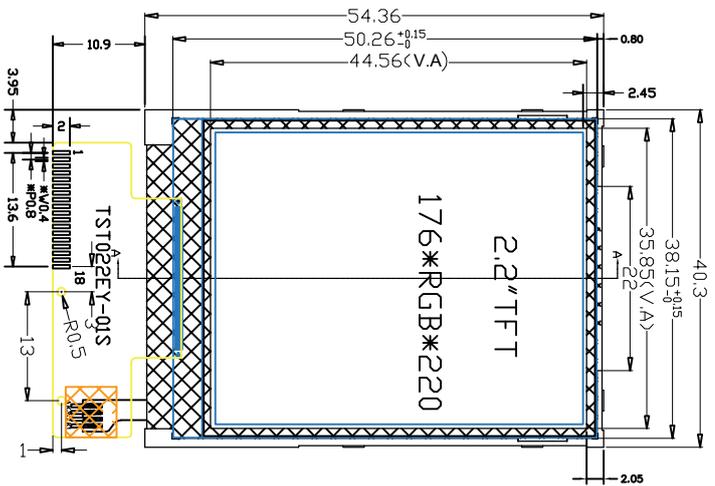

PIN	DESCRIPTION
1	VSS
2	LED-
3	LED+
4	VSS
5	RESET
6	A0
7	SDA
8	SCK
9	VDDA
10	VDDID
11	CS
12	VSS
13	NC
14	NC
15	NC
16	NC
17	VSS
18	VSS



LCD Type	2.2" TFT, Transmissive, Normally white TN
Resolution	176*(RGB)*220
View Direction	12 O'CLOCK
Driver IC	IL19225G
Color Depth	65K/262K
Interface Types	SP1
Backlight LEDs	3 LEDs, 60mA, 3.2V
Operating temperature	-20 C° ~ 70 C°
Storage Temperature	-30 C° ~ 80 C°
Storage Humidity	10RH ~ 40RH

☞ "Need to pay attention to size"

"*" As the focus control size

变更记录(Change History)

日期(Date)

视角(View):

比例(Proportion): 1 : 1

设计(DESIGN)

审核(AUDITING)

批准(APPROVED)

V1

V2

单位(Unit): M M

页面(Page): 1 / 1

V3

产品型号(Product Type):

TST022EY-01S

版本(Version):

V0

东莞市一众显示科技有限公司
DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.

3. Absolute Mixmum Ratings(Ta=25°C)

Characteristics	Symbol	Min	Max	Unit	Remarks
Power supple voltage(1)	VCC	-0.3	4.6	V	(1),(2)
Power supply voltage(1)	VCI-GND	-0.3	+4.6	V	(1),(2)
Power supply voltage(1)	VGH-GND	-0.3	+18.5	V	(1)
Power supple voltage(1)	GND-VGL	-0.3	+18.5	V	(1)
Power supply voltage(1)	DDVDH	-0.3	+6.0	V	(1)

Note:

- (1) If the LSI is used above these absolute maximum ratings, it may become permanently damaged. Using the LSI within the following electrical characteristics limit is strongly recommended for normal operation. If these electrical characteristic conditions are also exceeded, the LSI will malfunction and cause poor reliability.
- (2) $V_{cc} \geq GND$ must be maintained.
- (3) $DDVDH \geq GND$ must be maintained.

3.1 Environmental absolute maximum ratings

ITEM	SPECIFICATION	REMARKS
Operating Temp.	-20 ~ 70 °C	Note(1)
Storage Temp.	-30 ~ 80 °C	Note (1) , (2)

Note:

- (1) 90% RH Max
- (2) In case of below 0°C, the response time of liquid crystal (LC) becomes slower and the color of panel becomes darker than normal one.

4. ELECTRICAL CHARACTERISTICS

4.1 DC characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	V_{CC}		2.6	2.8	3.0	V
Input voltage	H level (VIH)		0.8VCC	--	V_{CC}	V
	L level (VIL)		-0.3	--	0.2V _{cc}	V
Supply current	I_{cc}	Without LED VCC=2.8V	--	5	--	mA

4.2 DC characteristics of the LED back-light

$T_a = 25^{\circ}C$

Item	Symbol	Min.	Typ.	Max.	Unit
LED module Forward voltage	V_{LED}	2.9	3.2	3.4	V
LED module current	I _{LED}	--	45	--	mA
Luminance	L _v	--	3800	--	Cd/m ²

Note: 3 LEDs in parallel of B/L module.

1 Test condition is:

a:Center point on active area


b:Best Contrast

2 Uniform measure condition:

a:Measure 9 point,Measure location is show below:

b:Uniform=(Min brightness/Max.brightness)x100%

c:Best Contrast.

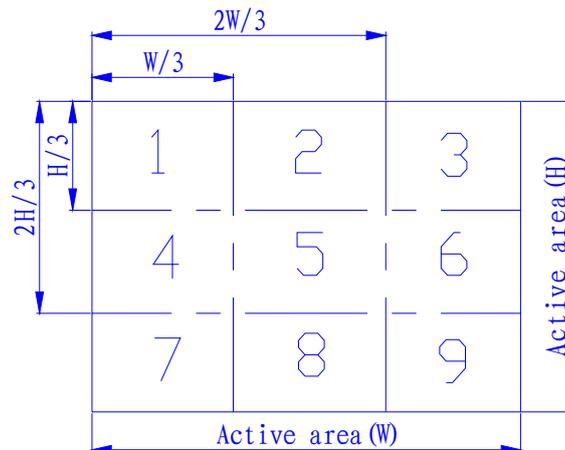

5 INTERFACE PIN CONNECTION

NO.	Symbol	Description
1	VSS	Ground
2	LEDK	Cathode of LED
3	LEDA	Anode
4	VSS	Ground
5	RESET	LCM reset pin
6	RS	Data and command Pin
7	SDA	SDA is serial data.
8	SCK	SCL is the serial data clock
9	VCC	Power Supply(2.8V)
10	IOVCC	Power Supply(1.8-2.8V)
11	CS	Chip selecting pin
12	VSS	Ground
13	YD	Touch panel down side
14	XL	Touch panel left side
15	YU	Touch panel up side
16	XR	Touch panel right side
17	GND	Ground
18	GND	Ground


说明:

本机型为4 wires Serial Peripheral Interface


6 ELECTRO-OPTICAL CHARACTERISTICS

No	Item	Symbol	Measuring Conditions		Min.	Typ.	Max.	Unit	Remark	
1	Response Time	Rise	Tr	$\theta = 0^\circ$ $\phi = 0^\circ$	25 °C		2	4	ms	Note (a)
		Fall	Tf	$\theta = 0^\circ$ $\phi = 0^\circ$	25 °C		6	12		
2	Viewing Angle (CR ≥ 10)	θ	θ	$\phi = 0^\circ$	25 °C	35	45	-	Deg	Note (b)
				$\phi = 180^\circ$	25 °C	35	45	-		
		θ	$\phi = 90^\circ$	25 °C	35	45	-			
			$\phi = 270^\circ$	25 °C	10	20	-			
3	Contrast Ratio	CR	-	25 °C		400	-	-	Note (c)	
4	Color of CIE Coordinate	White	X	25 °C	0.283	0.303	0.323	-	-	
			Y	25 °C	0.305	0.325	0.345			
		Red	X	25 °C	0.606	0.626	0.646			
			Y	25 °C	0.314	0.334	0.354			
		Green	X	25 °C	0.257	0.277	0.397			
			Y	25 °C	0.529	0.549	0.569			
Blue	X	25 °C	0.122	0.142	0.162					
	Y	25 °C	0.102	0.122	0.142					
5	Transmittance (without polarizer)	--	--	0 °C		16	-	%	-	

Note (a): Definition of Response Time

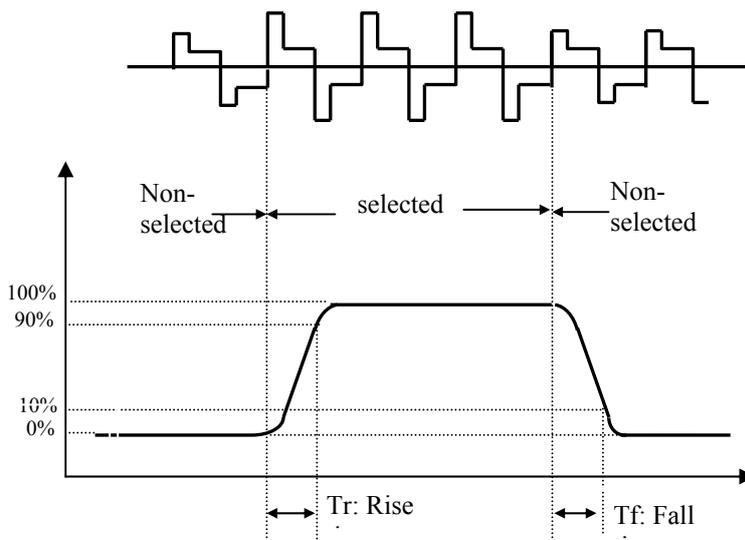


Note (b): Definition of Viewing Angle

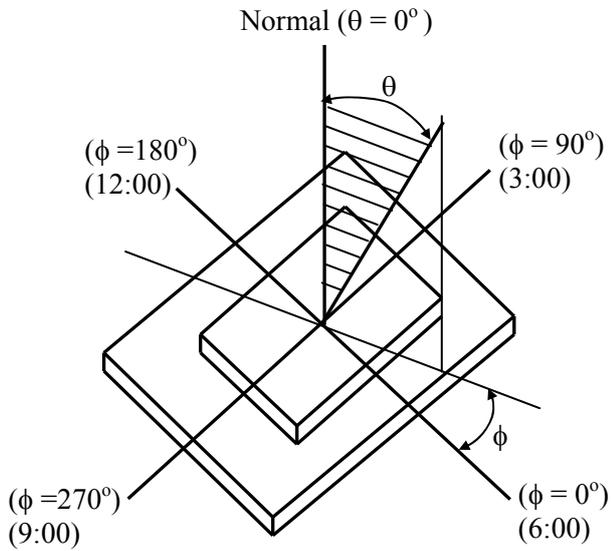

Note (c): Definition of Contrast Ratio

$$Cr = \frac{\text{Brightness of non-selected segment, } B2}{\text{Brightness of selected segment, } B1}$$

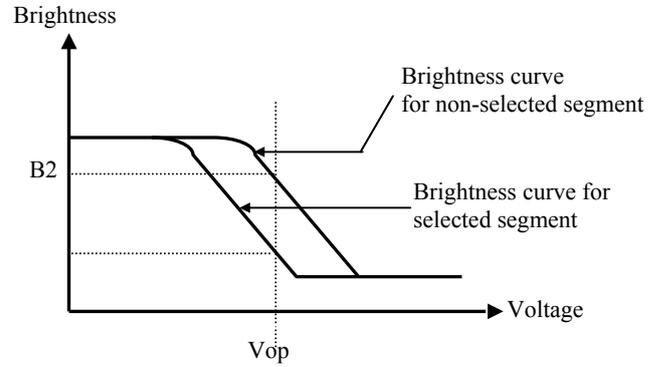

8 QUALITY ASSURANCE

8.1 Acceptable Quality Level (AQL)

Each lot should satisfy the quality level defined as follows:

- a) Inspection method: MIL-STD-105E Level II normal one time sampling
- b) AQL level

Category	AQL	Definition
Major	0.25%	Functional defective as product
Minor	1.00%	Satisfy all functions as product but not satisfy cosmetic standard

8.2 Cosmetic Screening Criteria

No	Defect	Judgment Criteria	Category	
1	Spots/Dust /Bubble (Round type)	Size, d (mm)	Acceptable quantity in active area	
		$d \leq 0.15$	Disregard	
		$0.15 < d \leq 0.20$	3	
		$d > 0.20$	0	
2	Spots/Dust /Bubble /Scratches (Line type)	Width, W (mm)	Length, L (mm)	Acceptable quantity in active area
		$W \leq 0.02$	Disregard	Disregard
		$W \leq 0.03$	$L \leq 1.0$	Disregard
		$W \leq 0.05$	$L \leq 2.0$	3
		$W > 0.05$	Disregard	0
3	Background color & Rainbow	Not to be noticeable.	Minor	
4	Allowable density	Above defects should be separated more than 30mm each other.	Minor	
6	Coloration	Not to be noticeable coloration in the viewing area of the LCD panels. Back-lit type should be judged with back-lit on state only.	Minor	
7	Rainbow	Not to be noticeable.	Minor	
8	Dot size	To be 95% ~ 105% of the dot size (Typ.) in drawing. Partial defects of each dot (ex. pin-hole) should be treated as 'spot'. (See <i>Cosmetic Screening Criteria (Operating) No.1</i>)	Minor	

Note: $d = (\text{long length} + \text{short length}) / 2$

9 PRECAUTIONS FOR USING LCD MODULE

9.1 Handing Precautions

- 9.1.1 The display panel is made of glass and polarizer. Do not subject it to mechanical shock by dropping or impact which may cause chipping especially on the edges.
- 9.1.2 Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.). The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- 9.1.3 If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with Isopropyl alcohol or ethyl alcohol. Avoid using solvents like acetone (ketene), water, toluene, ethanol to clean the polarizer surface.
- 9.1.4 Please keep the temperature within specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.
- 9.1.5 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- 9.1.6 Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion.
- 9.1.7 Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- 9.1.8 NC terminal should be open. Do not connect anything.
- 9.1.9 If the logic circuit power is off, do not apply the input signals.
- 9.1.10 Avoid contacting oil and fats.
- 9.1.11 Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizers. After products are tested at low temperature they must be warmed up in a container before coming is contacting with room temperature air.
- 9.1.12 Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading.

9.2 Electro-Static Discharge Control

- 9.2.1 Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC.
- 9.2.2 Be sure to ground the body when handling the LCD modules. Tools required for assembling, such as soldering irons, must be properly grounded.
- 9.2.3 To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions. To reduce the generation of static electricity, be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended.
- 9.2.4 The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.
- 9.2.5 When soldering the terminal of LCM, make certain the AC power source for the soldering iron does not leak.

9.3 Precaution for soldering to the LCM

9.3.1 Observe the following when soldering lead wire, connector cable and etc. to the LCD module.

9.4 Soldering iron temperature: 300 ± 10°C.

9.4.1 Soldering time: 3 sec.

9.4.2 Solder: eutectic solder.

9.4.3 If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation. (This does not apply in the case of a non-halogen type of flux.) It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.

9.5 Precautions for Operation

9.5.1 Viewing angle varies with the change of liquid crystal driving voltage (V_O). Adjust V_O to show the best contrast.

9.5.2 Driving the LCD in the voltage above the limit shortens its lifetime.

9.5.3 Response time is greatly delayed at temperature below the operating temperature range. However, it will recover when it returns to the specified temperature range.

9.5.4 If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.

9.5.5 When turning the power on, input each signal after the positive/negative voltage becomes stable.

9.6 Storage

9.6.1 When storing LCDs as spares for some years, the following precautions are necessary.

9.6.2 Store them in a sealed polyethylene bag. If properly sealed, there is no need for desiccant.

9.6.3 Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C.

9.6.4 Environmental conditions:

9.6.5 Do not leave them for more than 168hrs. at 60°C.

9.6.6 Should not be left for more than 48hrs. at -20°C.

9.7 Safety

9.7.1 It is recommended to crush damaged or unnecessary LCD into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.

9.7.2 If any liquid leaks out of a damaged glass cell and comes in contact with the hands, wash off thoroughly with soap and water.

Packaging Required

PARAMETER	Specification	Unit
Outside box	390(L) x 350(W) x 480(H)	mm
Inside pearl wool box	330(L)x185(W)x110(H)	mm
Product quantity of Inside box	64	pcs
Total product quantity	64*8=512	pcs
Total weight	11 ± 0.5	Kg

