

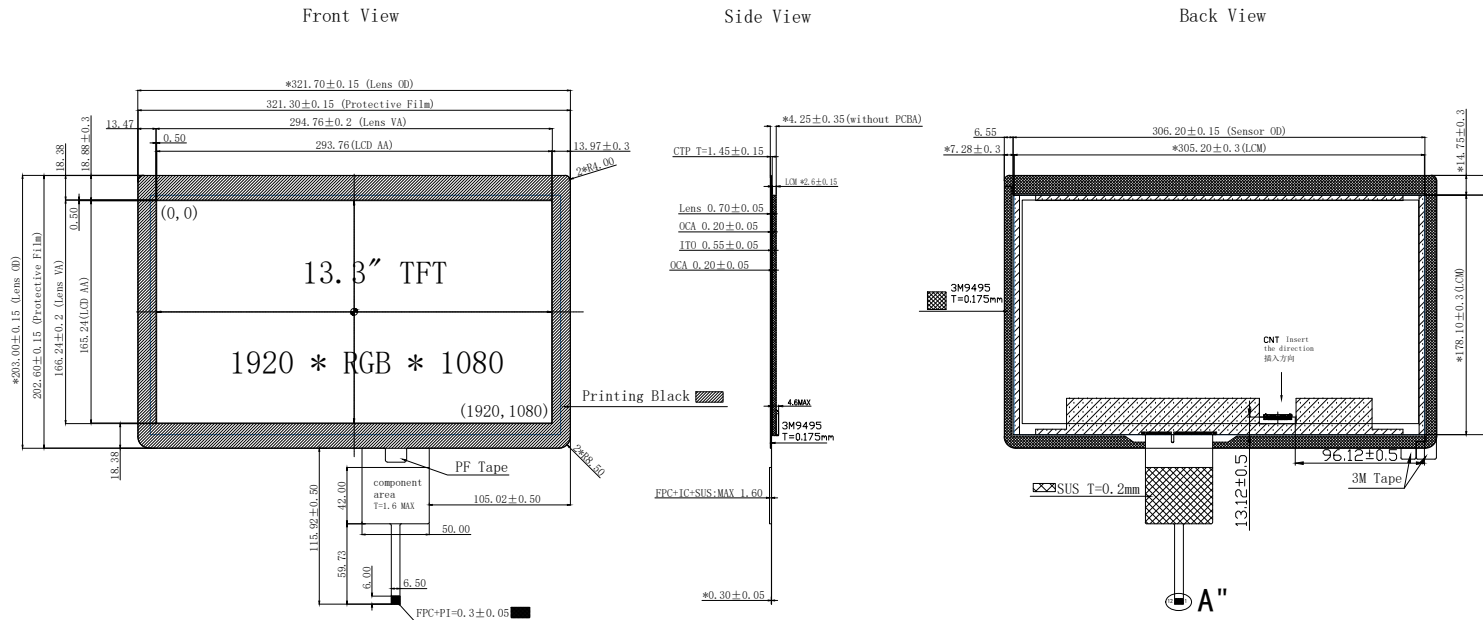


20455-030E-12 (IPEX)



1	NC
2	H_GND
3	lane1_N
4	lane1_P
5	H_GND
6	lane0_N
7	lane0_P
8	H_GND
9	AUX_CH_P
10	AUX_CH_N
11	H_GND
12	LCD_VCC
13	LCD_VCC
14	NC
15	LCD_GND
16	LCD_GND
17	HPD
18	LED-1
19	LED-2
20	LED-3
21	LED-4
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	BL-PWR
29	BL-PWR
30	NC

LCD Type	13.3" TFT, Transmissive, Normally Black, IPS
Resolution	1920(RGB)*1080
View Direction	All O'CLOCK
Color Depth	16.7M
Interface Types	EDP
Operating voltage	3.3V
TP/Lens	Without
Backlight LEDs	56 LEDs, 160mA, 21.5V
Surface luminance	150(Min)~190(Typ)cd/m ²
Operating temperature	-0 °C~50 °C
Storage Temperature	-20 °C~60 °C
Storage Humidity	60%~90% max

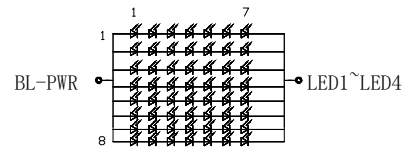

CTP Interface

PIN	Symbol	PIN	Symbol
1	+5V	7	RST
2	+5V	8	SCL 3.3V
3	DP	9	SDA 3.3V
4	DN	10	GND
5	GND	11	+3.3V
6	INT	12	+3.3V

" " Need to pay attention to			the key size with *			东莞市一众显示科技有限公司 DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.			
版本 (Version)	变更记录 (Change History)		日期 (Date)	视角 (View):	比例 (Proportion):	1 : 1	设计 (DESIGN)	审核 (AUDITING)	批准 (APPROVED)
A0	初始版本		2019.11.20	单位 (Unit):	MM	1 / 1			
				产品型号 (Product Type):	TST133FHPD-03C			Aron	
				图纸版本 (Version):	A0			2019.11.20	